



**SUBMITTAL DATA**

JOB/CUSTOMER:	SUBMITTED BY:
ENGINEER:	APPROVED BY:
CONTRACTOR:	ORDER NO:
SPECIFICATION REFERENCE:	



**INCLUDES**

Standard package comes with:  
 (1) SS1-200 (1) Hard-Wired Button  
 (1) Control Box Black with power cord, activation wires

**OPTIONAL ACCESSORIES**


- |   |  |
|---|--|
| <input type="checkbox"/> Hard-Wired LED Button    | <input type="checkbox"/> Bluetooth Wireless Transmitter Kit                            |
| <input type="checkbox"/> Hard-Wired Rocker Switch | <input type="checkbox"/> Bluetooth Wireless Motion Sensor                              |
| <input type="checkbox"/> Hard-Wired Motion Sensor | <input type="checkbox"/> Under Sink Mounting Kit<br>(For Systems without Return Lines) |

**TECHNICAL DATA**

FLOW RANGE: 0-33 GPM	MAX. WORKING PRESSURE: 145 PSI.
HEAD RANGE: 0-29 FT.	CONNECTORS: GF 15/26 Flange (With 3/4" MIP Stainless Steel Flanges not shown.)
MOTORS: 2-POLE SINGLE PHASE	HP MAX. SPEED: .262 HP
MIN. FLUID TEMPERATURE: 36° F	VOLTAGE (max. spd.): 115v/197 watts/1.80 Amps
MAX. FLUID TEMPERATURE: 230° F	APPROX SHIP WEIGHT: 14 lbs.

**DIMENSIONS**

\*Dimensions shown do not include connectors

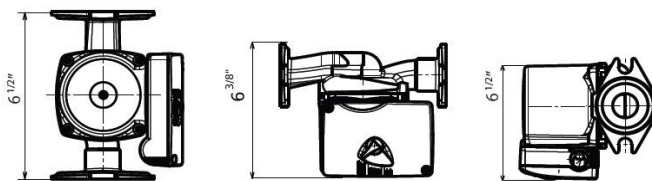

**PERFORMANCE CHART**

