

22-1/8" Depth, 6" High	MODEL
<ul style="list-style-type: none"> <li>◆ 750± CFM</li> <li>◆ 7" Round Duct</li> </ul>	C2030PS-SS C2036PS-SS C2042PS-SS C2048PS-SS
<ul style="list-style-type: none"> <li>◆ 900± CFM</li> <li>◆ 8" Round Transition</li> </ul>	C2030PS-8-SS C2036PS-8-SS C2042PS-8-SS C2048PS-8-SS
<ul style="list-style-type: none"> <li>◆ 1000± CFM</li> <li>◆ 10" Round Transition</li> </ul>	C2030PS-K-SS C2036PS-K-SS C2042PS-K-SS C2048PS-K-SS
<ul style="list-style-type: none"> <li>◆ 1270± CFM</li> <li>◆ Two 7" Round Ducts</li> </ul>	C2036PS1-TW-SS C2042PS1-TW-SS C2048PS1-TW-SS C2054PS1-TW-SS C2060PS1-TW-SS
<ul style="list-style-type: none"> <li>◆ 1520± CFM .</li> <li>◆ Two 8" Round Transitions</li> </ul>	C2036PS1-TW-8-SS C2042PS1-TW-8-SS C2048PS1-TW-8-SS C2054PS1-TW-8-SS C2060PS1-TW-8-SS
18-1/8" Depth, 6" High	MODEL
<ul style="list-style-type: none"> <li>◆ 635± CFM</li> <li>◆ 7" Round Duct, 4.25" Off Center</li> </ul>	<b>C2030BP1-SS</b> <b>C2036BP1-SS</b> <b>C2042BP1-SS</b>
<ul style="list-style-type: none"> <li>◆ 735± CFM</li> <li>◆ 7" Round Duct</li> </ul>	C2030BP-SS C2036BP-SS C2042BP-SS C2048BP-SS
<ul style="list-style-type: none"> <li>◆ 880± CFM</li> <li>◆ 8" Round Transition</li> </ul>	C2030BP-8-SS C2036BP-8-SS C2042BP-8-SS C2048BP-8-SS
<ul style="list-style-type: none"> <li>◆ 990± CFM</li> <li>◆ 10" Round Transition</li> </ul>	C2030BP-K-SS C2036BP-K-SS C2042BP-K-SS C2048BP-K-SS
<ul style="list-style-type: none"> <li>◆ 1250± CFM</li> <li>◆ Two 7" Round Ducts</li> </ul>	C2036BP1-TW-SS C2042BP1-TW-SS C2048BP1-TW-SS C2054BP1-TW-SS C2060BP1-TW-SS
<ul style="list-style-type: none"> <li>◆ 1500±</li> <li>◆ Two 8" Round Transitions</li> </ul>	C2036BP1-TW-8-SS C2042BP1-TW-8-SS C2048BP1-TW-8-SS C2054BP1-TW-8-SS C2060BP1-TW-8-SS



C2000 Mesh Filters

### FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Aluminum Mesh
- ◆ Front Panel Lighting: 38 Watt Halogen Included.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. Suggested use with 15 Amp Circuit
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.


### OPTIONS:

- ◆ 9.5 Watt LED available. (50 Watt Halogen Equivalent)  
 30" to 48" Hoods take 2 Bulbs (1 Set)  
 54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Flange for the perfect fit if needed.
- ◆ Transition.
- ◆ Remote wiring.

NO Performance Warranty over BBQ Grills/Griddles.



# Ventilator Insert, Mesh Filters, Specifications C2000BP1

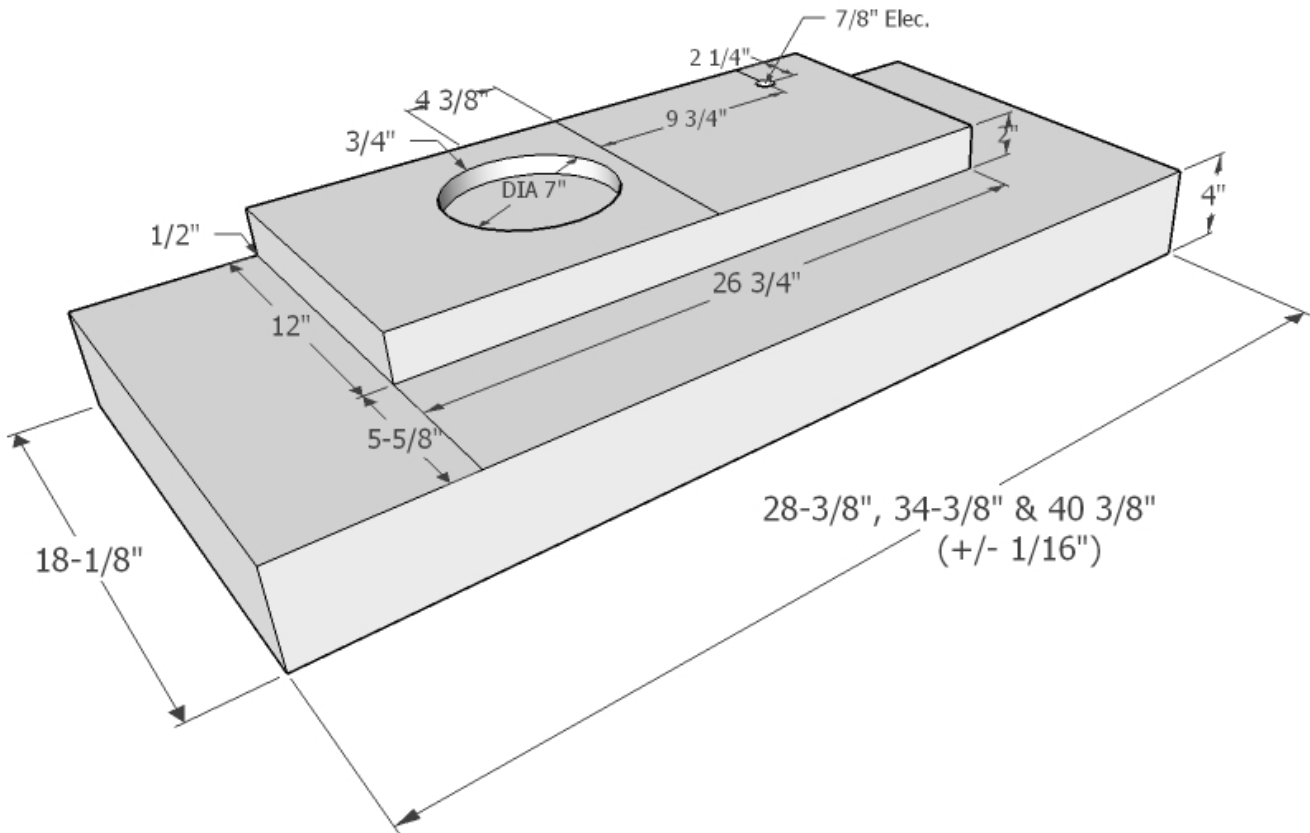

**SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!**

All dimensions are ( $\pm$ )  $1/16$ " and are subject to change. Drawings are not to scale.