



Masters in Home Ventilation Since 1946



Lomanco's Manufacturing Plant in Jacksonville, Arkansas

Our high product quality and functionality, combined with our well-recognized integrity and solid partner base has established Lomanco as the premier manufacturer of residential ventilation products in the world. Our success has been built on pride, dedication and the hard work of Lomanco's owners, management, employees, sales representatives, vendors and customers since 1946.
– Your Lomanco® Team.

Contents	2	Power Vents	10	Intake Vents.....	18
What is Ventilation?	3	Lomancool™ 2000.....	10	Drip Edge Soffit Vent	18
Why Ventilate?.....	3	Add-A-Vent 1800.....	10	C-Series Cornice Vents.....	18
3 Must Do Steps	3	Solar Power Vent	11	Continuous Soffit vents	19
Using QR Codes.....	3	Omni Solar Vent™	11	Cirk - L - Vents.....	19
The Lomanco® Balance.....	3	Omni Solar Gable Vent	11	Gable Vents	20
Omni Ridge Vents	4	Ventilation Solutions	12	Triangular Line.....	20
Shingle Over Ridge Vents	4	Metal Roof Ridge Vent.....	12	Square Line.....	20
Lo-OmniRoll®	5	LPR/VUR Ridge Vents	13	Foundation Vents	21
OmniRidge®.....	5	Omni-Wall™	13	Carton Information Index.	22
Lo-OmniRidge®.....	5	Powered Crawlspace Vent ...	14	Social Media Information .	23
OmniRoll®	5	EVA-34 & EVA Combo	15	Ventilation Seminars.....	23
Static Roof Vents	6	Cupola.....	15	Facebook.....	23
Slant Back Style	7	Weather Vanes.....	15	YouTube Channel.....	23
Pan Style	7	Tile Roof Vents	16	Twitter.....	23
Plastic Roof Vents	7	TileRidge® Vent.....	16	Lomanco® Website	23
Turbine Vents.....	8	Solar Tile Vent	16		
Whirlybird®	9	TileIntake® Vent.....	17		
		Tile Roof Turbine.....	17		

lomanco.com



What is Ventilation?

Ventilation is simply the process of supplying a continuous supply of air through the attic space. "Proper Ventilation" consists of 50% intake, under the eaves, and 50% exhaust, near or at the roof peak, at least 3 feet higher than the intake system.

Why Ventilate?

To fight the enemies, heat and moisture, you must ventilate year round. Heat in unventilated attics may cause temperatures to exceed 150 degrees causing damage to shingles, roof sheathing, and possibly radiate to the living area. Moisture, being the #1 enemy, causes rot, mildew, mold, paint blisters, and renders insulation to be ineffective. Proper ventilation reduces energy bills, winter ice build up, and eliminates mold/mildew which can lead to major health problems. By ventilating, you are extending the life of shingles, insulation, and other building components.

Vent with the Best!

Lomanco has been producing quality ventilation products since 1946. Two factors have remained the same throughout the years. They are known as "The Lomanco® Balance", free movement of air and weather protection. We take a great deal of pride in the production of our products. They are the necessity to be effective in ventilating homes everywhere. Product design does make a difference in quality ventilation products. Our commitment to providing these quality products, combined with our experienced personnel, is the reason Lomanco is your best choice for ventilation.

THREE MUST DO Steps to Attic Ventilation

- 1 Install all Exhaust Ventilation at the SAME HEIGHT within a common attic area.**
Installation of exhaust vents at more than one level on a roof allows the upper exhaust vent to pull air in from lower exhaust vents rather than from the soffit Intake Vents. Intake air must come from the soffit vent area to properly ventilate the total attic area and eliminate weather infiltration.
- 2 Install ONLY ONE TYPE of Exhaust Ventilation within a common attic area.**
Exhaust Vents pull air from the easiest intake source. The use of two or more types of exhaust vents such as Power Vents with Roof Vents or Gable Vents with Ridge Vents or Roof Vents could make one of these vents act as intake for the other. Intake air must come from the soffit vent area to properly ventilate the total attic area and eliminate weather infiltration.
- 3 Install a BALANCED SYSTEM of Intake and Exhaust Ventilation.**
50% Intake Vents - Soffit Panel Systems are a common source of intake ventilation in today's homes. Please keep in mind that it takes ten or more vented soffit panels to equal the ventilation capacity of one 16 x 8 soffit vent. We highly recommend that you install all vented soffit panels and use air chutes in every rafter/truss soffit opening.
50% Exhaust Vents - Use your Lomanco® Ventilation Selector Guide to determine the number of vents needed to properly ventilate an attic to meet the Ventilation Minimum Property Standard. Roof Shingle and Insulation Warranties require it!



QR Codes like the one shown above are used throughout our catalog.

You can scan these QR codes with almost any smartphone or tablet. You may need to install an app first, most QR code apps are free.

When you scan the code on any page you will instantly view unique details for all products on that page. This includes installation instructions, product details or videos.

SO, PLEASE BE SURE TO SCAN THE CODE!

The same detailed product information is also available at lomanco.com

It is important to manufacture products that have the correct emphasis on Net Free Area, weather protection, and longevity. Lomanco has spent a great deal of time and energy in making sure the proper amount of each is present. By making sure our products have the appropriate amount of each factor, what is known as "The Lomanco® Balance" is achieved.





LOR-30

Lomanco® Shingle Over Ridge Vents

Lomanco® Omni Series Ridge Vents are available in two versions and two styles. The roll version comes in easy to handle 20 and 30 foot lengths, while the stick version comes in 4 foot lengths. The regular **Omni style** is traditionally installed using a hammer, while the **Lo-Omni style**, with its low profile, can be installed using a nail gun.

Features—All Omni Series Shingle Over Ridge Vents come with a lifetime limited warranty. The engineered material guarantees it will last as long as your shingles.

Other common features of Omni Series Ridge Vents is the air flow acceleration design, which maximizes ventilation capacity, along with the internal aerodynamic curved baffles and external perpendicular omni baffles, which maximize weather protection. External omni baffles allow air flow from any direction, while the internal baffles maintain superior weather protection and performance with no filter to clog. Each Omni Series Ridge Vent design is field tested and proven effective under all weather conditions.

Installation—Installation of Omni Series Ridge Vents is fast and easy and will fit any roof pitch from a 2/12 to a 16/12. The Omni Series Ridge Vents feature supported nail holes every foot and will not crush down. Molded-in visual nail lines and center lines along with the patented fan-folded end plugs mean no accessories, connectors or alterations are needed.

Common Features

- ▶ Lifetime limited warranty.
- ▶ Adjusts from 2/12 to 16/12 roof pitches.
- ▶ Engineered material guarantees longevity.
- ▶ Field tested design - proven effective under all weather conditions.

Model	LTH (ft.)	NFA (in. ²)
LOR-30* †	30'	330
LOR9-4* †	4'	44
LOR9-4FR †	4'	44
OR-20	20'	360
OR-4* †	4'	72
OR4-N* †	4'	72

CFM at Wind Velocity of

	3 MPH	8 MPH	15 MPH
LOR-30	52	148	283
LOR9-4	52	148	283
LOR9-4FR	52	148	283
OR-20	95	235	430
OR-4	95	235	430
OR4-N	95	235	430

Above CFM are per 4-Ft. Sections

†

MIAMI-DADE COUNTY
APPROVED

* Texas Department of Insurance "Windstorm" Approved



CSA-Approved
83070



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Omni Ridge Vent Series

Lo-OmniRoll®


LOR-30



- ▶ Compact 30 foot roll is easy to handle.
- ▶ Pneumatic nail gun or hammer installed.
- ▶ Exterior convolute baffles—incurved design allows flexibility to roll up and out while maintaining its shape.
- ▶ Two coils of 1¾" nails provided.
- ▶ Can be cut at one foot intervals—multiple cut lines eliminates unnecessary scrap.

OmniRidge®

OR-4



- ▶ External venturi baffle.
- ▶ Weatherproof under-lapping joint.
- ▶ Four drain holes per foot per side.
- ▶ Pre-formed to 3/12 pitch.
- ▶ External water shield.

OR4-N

- ▶ OR4-N is OR-4 with nails included.
- ▶ 30, 2½" ring shank nails per piece.

5


How many Ridge Vents do you need?

Attic floor space to be ventilated in square feet:

EXHAUST SYSTEM	1000						1500						2000						2500						3000						3500												
	Intake System						Exhaust	Intake System						Exhaust	Intake System						Exhaust	Intake System						Exhaust	Intake System														
	C416	C616	C816	105/190	140	SV-10		C416	C616	C816	105/190	140	SV-10		C416	C616	C816	105/190	140	SV-10		C416	C616	C816	105/190	140	SV-10		C416	C616	C816	105/190	140	SV-10	C416	C616	C816	105/190	140	SV-10			
LOR30	22'	10	7	4	4	3	4	33'	15	10	6	6	5	5	6	44'	20	14	8	7	6	8	55'	25	17	10	9	7	10	66'	30	20	12	11	9	12	77'	34	23	14	12	10	14
OR20	14'	11	7	4	4	3	4	20'	15	10	6	5	5	6	27'	20	14	8	7	6	8	34'	25	17	10	9	7	10	40'	29	20	12	10	9	12	47'	34	23	14	12	10	14	
OR4	4	12	8	5	4	4	5	5	15	10	6	5	5	6	7	21	14	8	7	6	8	9	26	18	10	9	8	11	10	29	20	12	10	9	12	12	35	24	14	12	10	14	
LOR9-4	6	11	8	5	4	3	5	9	16	11	7	6	5	7	11	20	14	8	7	6	8	14	25	17	10	9	7	10	17	30	21	12	11	9	12	20	36	24	14	13	10	14	


Lo-OmniRidge®

LOR9-4

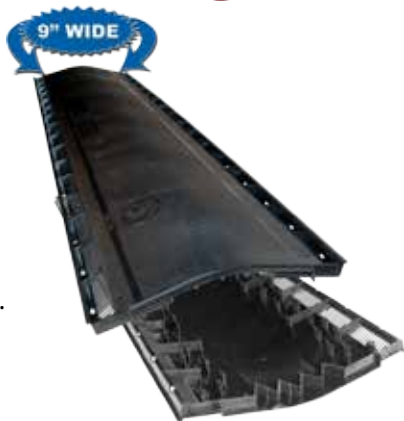

- ▶ Pneumatic nail gun or hammer installed.
- ▶ External venturi baffle.
- ▶ Weatherproof underlapping joint.
- ▶ External water shield.
- ▶ Molded centerline for fast and easy alignment.

Available in Class A



OmniRoll®

OR-20



- ▶ Compact 20 foot roll is easy to handle.
- ▶ Exterior convolute baffles—incurved design allows flexibility to roll up and out while maintaining its shape.
- ▶ Can be cut at one foot intervals—multiple cut lines eliminate scrap.

Shingle Over Ridge Vents

The width of the peak cut is extremely important for product performance and weather protection. Pay special attention to the recommended hole cut size on each instruction sheet to avoid vulnerability to weather infiltration.





Lomanco® Static Roof Vents

Lomanco provides a complete line of Roof Vents from which to choose. Static Vents are available in two designs, Slant Back and Pan Style, to fit all of your ventilation needs. The Slant Back design is available in Aluminum, Plastic, and Galvanized finishes. Lomanco® Pan Style Series consists of the 550, 600, and 135 Roof Vents and is available in aluminum finish only.

Features—Lomanco® Static Vents are exhaust vents by design. Each vent's unique design offers maximum weather protection. All of Lomanco® Static Roof Vents are available in several colors to blend with your roofing materials. Other common features include a bird-proof design, a weather tight sealed collar, and a high profile and rolled flange on the vent stack for superior weather protection and circulation.

Installation—All Lomanco® Static Vents offer a large nailing flange for ease of installation. The Lomanco® Slant Back is designed to be installed on any roof pitch.

The Lomanco® 750 Original Slant Back — Often Imitated, but Never Duplicated.

Available Colors



135,730,750,770,770-D

MIAMI-DADE COUNTY
APPROVED

CSA®
CSA-approved
(750,550,845,865)
83070

* Texas Department of
Insurance "Windstorm"
Approved

How many Roof Vents do you need?

Your attic floor space to be ventilated in square feet.

1000 | 1500 | 2000 | 2500 | 3000 | 3500

ROOF VENT SYSTEM

550	5	8	10	12	15	17
600	4	6	8	10	12	14
730	8	12	16	20	24	28
750	5	8	10	12	15	17
770	4	6	7	9	11	12
135	2	3	4	5	5	6
845	6	9	12	15	18	21
865	4	6	8	10	12	14

ROOF VENT SYSTEM

C416	10	16	20	24	30	34
C616	8	10	14	18	20	24
C816	4	6	8	10	12	14
105/190	4	6	8	10	10	12
140	4	6	6	8	10	10
SV-10	4	6	8	10	12	14

Model	Overall Size (in.)	Opening Size (in.)	Net Free Area (in. ²)
730*	12 ³ / ₁₆ x 17 ³ / ₄ x 4	6 1/4	30
750*	16 x 20 ⁵ / ₁₆ x 5	8	50
750-S	16 x 20 ⁵ / ₁₆ x 5	8	50
750-G*	16 x 20 ⁵ / ₁₆ x 5	8	50
Galvanized Steel			
750-GS*	16 x 20 ⁵ / ₁₆ x 5	8	50
Galvanized Steel			
750-E	23 x 27 ¹ / ₄ x 5	8	50
770*	16 ⁵ / ₈ x 22 ³ / ₈ x 6	9 ¹ / ₂	70
770-D*	32 ¹ / ₂ x 22 ³ / ₈ x 6	Two 9 ¹ / ₂	140
700	16 x 20 ⁵ / ₁₆ x 5	8	—
550	15 ³ / ₈ x 16 ¹ / ₂ x 4	9	50
550-S	15 ³ / ₈ x 16 ¹ / ₂ x 5 ¹ / ₂	9	50
600	16 ⁵ / ₈ x 18 ⁷ / ₈ x 4	9 ¹ / ₂	60
600-D	32 ¹ / ₂ x 18 ⁷ / ₈ x 4	Two 9 ¹ / ₂	120
600-S	16 ⁵ / ₈ x 18 ⁷ / ₈ x 6 ¹ / ₂	9 ¹ / ₂	60
135*	20 x 23 x 7 ³ / ₄	14	144
845	14 ³ / ₈ x 17 ¹ / ₄ x 4	6 ³ / ₄ x 8 ¹ / ₂	41
865	16 ¹ / ₂ x 19 ³ / ₈ x 4 ³ / ₄	8 ¹ / ₂ x 10 ¹ / ₄	61
865-S	16 ¹ / ₂ x 19 ³ / ₈ x 6 ¹ / ₁₆	8 ¹ / ₂ x 10 ¹ / ₄	61




Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Static Roof Vents

700 Series

- ▶ Designed to prevent roof discoloration.
- ▶ Three sides louvered for greater air flow.
- ▶ Embossed aluminum finishes add strength, extend paint life, and blend with roofing materials.
- ▶ 700 has neoprene damper for use as kitchen/bathroom exhaust vent.
- ▶ 730 is a smaller version of a 750 and included in the EVA Combo vent package. (See page 15)
- ▶ 750-E is a 750 with an extended flange size.
- ▶ 750-S is a 750 with screen.
- ▶ 750-G; heavy duty galvanized steel construction.
- ▶ 750-GS is a 750-G with screen.
- ▶ 770 is larger version of a 750.
- ▶ 770-D is a twin 770; off-ridge vent.

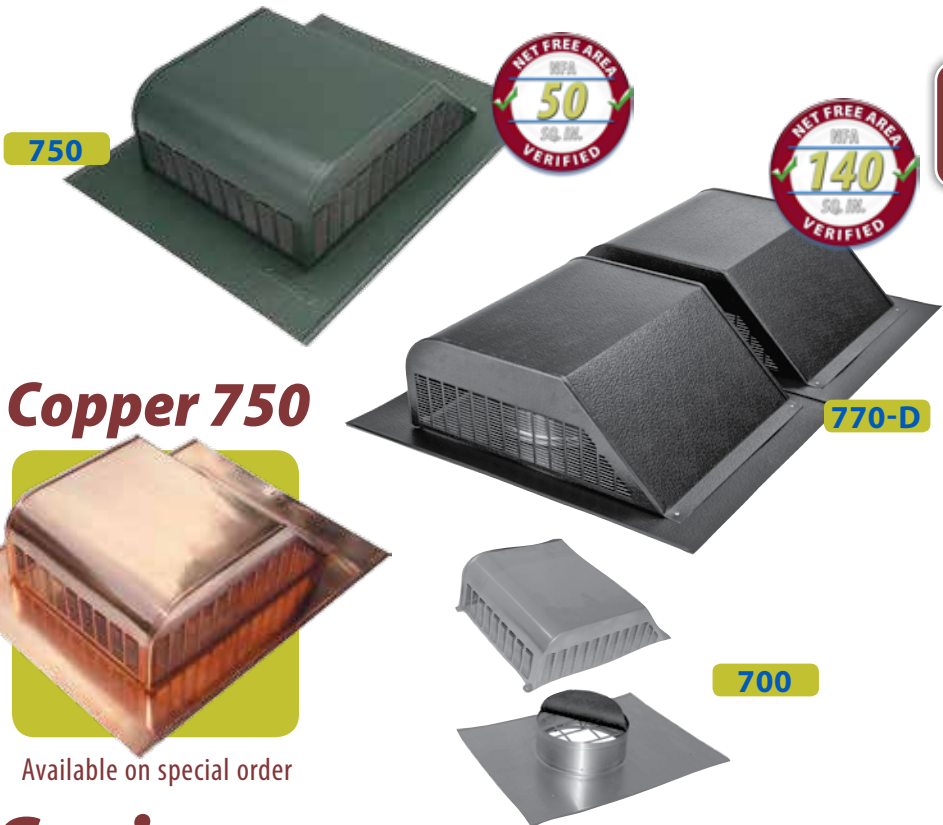

Copper 750



Available on special order

550 & 600 Series

- ▶ Includes 8x8 perma-coated screen extended to the edges of the cap.
- ▶ Rolled flange on vent stack to prevent weather infiltration.
- ▶ Models 600-S and 550-S have a tall throat to allow room for air circulation on shake roofs after the installation of shakes.
- ▶ 600-D is a twin 600.




135 Roof Vent

- ▶ All-aluminum construction.
- ▶ 8x8 aluminum screen attached.
- ▶ Weather-shielding rain guard for maximum weather protection.



800 Series

- ▶ Made of durable ABS plastic.
- ▶ UV Protection for longer life.
- ▶ Large nailing flange with pre-drilled nail slots to allow for expansion and contraction and ease of installation.
- ▶ 8x8 perma-coated screen extends to the edges of the cap to protect from bird and insect intrusions.
- ▶ 865-S has a tall throat to allow room for air circulation on shake roofs.

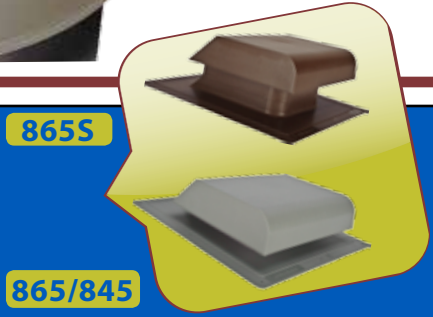

865S

865/845

Your All Weather Whirlybird®



Lomanco® Whirlybird® Turbine Vents

Lomanco is the home of the original Whirlybird® Turbine Ventilator, the All Weather Whirlybird® Turbine. Whirlybird® Turbines offer all of the essentials for energy savings and are geared toward going green. They are available in three sizes—8", 12", and 14". The 14" Big Whirly turbine moves 37% more air than the 12". The 12" turbine is available in aluminum and galvanized finishes as well as a Tile Roof design. Whirlybird® turbines are also available in two models—internally or externally braced. While the internally and externally braced turbines both have the same internal construction, the externally braced turbines have three braces that surround the outside of the turbine.

Features—All Lomanco® Whirlybird® turbines come with a Lifetime Transferable Warranty. Simply put, you can't buy a better turbine. The turbine design features permanently lubricated upper and lower ball bearings that ensure long life and no maintenance. Other common features of the turbine are its rigid spider-type construction—riveted at every connection and tested to withstand winds of 110 M.P.H., 21 air-foil curved vanes with rolled edges to deflect water, and 100% rust-free all-aluminum construction.

Installation—The Whirlybird® turbine's large flashing makes installation easy. The Whirlybird® turbine's exclusive vari-pitch base adjusts to a 12/12 roof pitch for use on many roof applications. When installed properly, the Whirlybird® turbine reduces energy bills and the likelihood of winter ice buildup.

Available Colors



foreverguarantee

The Quality & Performance of the Lomanco® Whirlybird® Turbine is Guaranteed Forever

Model	Hole Size	Height	Base
B B-12*	12	17¼	20 x 20
BEB-12*	12	17½	20 x 20
B B-12TR*	12	20¼	20 x 20
BEB-12TR*	12	20½	20 x 20
B B-14*	14	20	22 x 22
BEB-14*	14	20½	22 x 22
T B-12	—	11¼	—
TEB-12	—	11½	—
T B-14	—	11½	—
TEB-14	—	12	—
GT-12	12	15¾	20 x 20
GEB-12	12	16	20 x 20
I B-8 (Top)	8	14¼	-
VP-8 (Bottom)	8	7¾	16 x 16

All B Series Turbines

MIAMI-DADE COUNTY
APPROVED

* Texas Department of Insurance "Windstorm" Approved



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Whirlybird® Turbine Vents

BIB-12



WB

BIB-12



WH

BIB-12



BL

BEB-14



BR

BEB-14



MF

- ▶ Forever guarantee—residential use only.
- ▶ All-aluminum construction.
- ▶ Exclusive vari-pitch base adjusts to 12/12 roof pitch.
- ▶ Tested to withstand winds of 110 M.P.H.
- ▶ Easy installation.

Permanently lubricated upper and lower ball bearings that ensure long life and no maintenance.



GT-12

- ▶ 0.015 stamped galvanized steel.
- ▶ Fits any roof pitch to 7/12.
- ▶ GT-12 is an internally braced 12" turbine.
- ▶ GEB-12 is an externally braced 12" turbine.
- ▶ Residential or light commercial use only.



MF Only

How many Whirlybirds® do you need?

Your attic floor space to be ventilated in square feet.

	1000		1500		2000		2500		3000		3500	
TURBINE VENT EXHAUST SYSTEM												
Turbine Size	12"	14"	12"	14"	12"	14"	12"	14"	12"	14"	12"	14"
12"	2	2	3	4	4	5						
14"	2	2	2	3	3	4						
TURBINE VENT INTAKE SYSTEM												
Turbine Size	12"	14"	12"	14"	12"	14"	12"	14"	12"	14"	12"	14"
C416	21	29	21	29	32	29	42	43	42	43	53	57
C616	15	20	15	20	22	20	29	29	29	29	36	39
C816	9	11	9	11	13	11	17	17	17	17	21	22
105/190	8	10	8	10	11	10	15	15	15	15	19	20
140	6	9	6	9	9	9	12	13	12	13	15	17
SV-10	9	12	9	12	13	12	17	17	17	17	21	23

General Specifications for Whirlybirds®

- ▶ BIB & TIB are **internally** braced.
- ▶ BEB & TEB are **externally** braced.
- ▶ GT-12, GEB-12, & IB-8 available in mill finish only.
- ▶ TR turbines are for tile roof applications.
- ▶ B Series are packaged with base.
- ▶ T Series are packaged without base.
- ▶ Model number denotes throat size.

Hurricane caps for 12" and 14" turbines are available online at lomanco.com.

Only the finest quality American-made bearings are used in Lomanco's Whirlybird®. Other turbines may skimp on bearing quality, but at Lomanco® we know that bearings are the heart of the turbine. If they are out of round, poorly sealed or made with inferior materials, they simply will not last or run as quietly as the Lomanco® Whirlybird®.



Lomancool™ 2000



2000

Lomanco® Standard Power Vents

Lomanco® Standard Power Vents are designed for quiet operation and high volume air removal. Lomanco offers two styles of electric power vents—the Lomancool™ 2000 and the 1800 Add-A-Vent. The Lomancool™ 2000 is a roof mount power vent and the 1800 is designed to be mounted behind an existing vent to add powered ventilation to a gable.

Features—Lomanco® Standard Power Vents are made of all aluminum construction. Other common features include a 5 year limited warranty, balanced fan blades for quiet operation, and an American-made motor. An optional humidistat is available for both the 2000 and the 1800. The Lomancool™ 2000TH comes equipped with an adjustable thermostat/humidistat combo control to accommodate individual attic humidity levels.

Installation—Lomanco® Standard Power Vents are equipped with an adjustable thermostat that features a “push-to-test” button, allowing homeowners to make sure the unit is operating properly.

Available Colors



- ▶ Deep drawn flange and unique rain shield keep water out.
- ▶ Factory-set adjustable thermostat (switches on at 100 degrees and off at 85 degrees).
- ▶ Adjustable humidistat settings are: minimum 80%, normal 42%, and maximum 20%.
- ▶ 8x8 aluminum screen attached for insect protection.
- ▶ 2000TH model equipped with thermostat/humidistat combo switch.
- ▶ 5 Year limited warranty.

How many Power Vents do you need?

Your attic floor space to be ventilated in square feet.

1000 | 1500 | 2000 | 2500 | 3000 | 3500

POWER VENT EXHAUST SYSTEM

2000	1	2	2	3	3	4
1800	1	NR	NR	NR	NR	NR

POWER VENT INTAKE SYSTEM

C416	31	62	62	93	93	123
C616	21	42	42	63	63	84
C816	12	24	24	36	36	48
105/190	11	22	22	32	32	43
140	9	18	18	27	27	35
SV-10	13	25	25	37	37	49

Add-A-Vent 1800

- ▶ Factory-set adjustable thermostat (switches on at 100 degrees and off at 85 degrees).
- ▶ Can be mounted in horizontal or vertical positions on either 16" or 24" on center framing members.
- ▶ Optional humidistat is adjustable to fit individual attic humidity levels.
- ▶ Designed to mount behind existing gable louver.
- ▶ 5 year limited warranty.



1800

Copper 2000



Available on special order

Model	Amps	Motor		Volts	Base (in.)	Fan Blades	
		HP	RPM			No.	DIA. (in.)
2000* †	3.4	1/10	1100	120	20 x 23	5	12
2000TH †	3.4	1/10	1100	120	20 x 23	5	12
1800	3.4	1/10	1100	120	—	5	12



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Powered Roof Vents

• *Omni Solar Vent™*

11

OSV40

Lomanco® Solar Power Vents

Lomanco's Solar Power Vents are your attic's best choice for solar powered protection against heat and moisture from sun-up to sun-down. We have created a unique design that is not only functional, but looks good on the roof.

Features—The Omni Solar Vent™ and Omni Solar Gable vent feature a 40+ Watt solar panel, the largest standard panel offered on solar attic vents.* They also include a 10 year limited warranty and a 5 year limited warranty on the solar panel and motor. Other common features include a whisper quiet motor and precision balanced 5 blade fan.


Installation—Installation couldn't be easier with our Solar Power Vents. In fact, there is no need for an electrician. The Omni Solar Vent™ and Omni Solar Gable Vent will operate automatically when the solar panel is illuminated by sunlight.

Available Colors



Common Features

- ▶ 40+ Watt solar panel.*
- ▶ 15 foot power cord.
- ▶ Solar panel remotely mounted for optimum energy collection.
- ▶ Easy Installation. No electrician required.
- ▶ 10 year limited warranty, 5 year on solar panel & motor.
- ▶ Eligible for a 30% Federal Tax Credit for Homeowners. See the Solar Power Vent page on lomanco.com for further details.



- ▶ The OSV40 is a **Proven Best Performer** for solar powered attic ventilation.
- ▶ Heavy duty aluminum construction.
- ▶ Upward exhaust prevents roof discoloration.
- ▶ Low profile design blends with roof profile.
- ▶ Internal screen for protection from insects.

How many Solar Vents do you need?

Your attic floor space to be ventilated in square feet.

1000 | 1500 | 2000 | 2500 | 3000 | 3500

OMNI SOLAR EXHAUST SYSTEM

OSV40	1	2	2	3	3	4
SGABLE40	1	NR	NR	NR	NR	NR

OMNI SOLAR INTAKE SYSTEM

C416	31	62	62	93	93	123
C616	21	42	42	63	63	84
C816	12	24	24	36	36	48
105/190	11	22	22	32	32	43
140	9	18	18	27	27	35
SV-10	13	25	25	37	37	49

Omni Solar Gable Vent

- ▶ Provides additional ventilation to gable vents.
- ▶ Whisper quiet motor.
- ▶ Precision balanced 5 blade fan.
- ▶ 768 square inches of Net Free Area required for each vent.
- ▶ Glass-filled polypropylene shroud.



LARGEST STANDARD SOLAR PANEL 40+ WATTS*

SGABLE40

Original parts and accessories are available for all Lomanco® power roof vents online at lomanco.com

Model	Base (in.)	Fan Blades	
		No.	DIA. (in.)
OSV40 †	33.5 x 33.5	5	14
SGABLE40	17.5 x 17 x 6	5	14



*Rated Power: 40W – Power Tolerance (W): 0, +4.99

Solar Power Vents

Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.




Metal Roof Ridge Vent Kit

Lomanco offers the Metal Roof Ridge Vent Kit to fit many different Metal Roof Profiles. The Metal Kit is designed to be used in conjunction with the Lomanco® Lo-OmniRoll®. The Kit contains enough butyl tape, foam closure strips, and screws to cover 30 feet of ridge.

Installation—The Metal Kit closure strips come in easy to manage lengths and are easy to install. Screws are inserted directly through the Ridge Vent, through the closure strip, and into the roof decking. The rigid foam closure strips of the Metal Kit ensure minimal compression.


Model	Installation Kit (One Per LOR-30)	LTH.(ft.)	NFA (in. ²)
*KIT34R9	Kit contains all items for complete installation	30	330
*KIT5VP	Kit contains all items for complete installation	30	330
*KITSS116	Kit contains all items for complete installation	30	330
*KITRP	Kit contains all items for complete installation	30	330
*KIT34FR9	Kit contains all items for complete installation	30	330

*Lo-OmniRoll® LOR-30 vent sold separately.

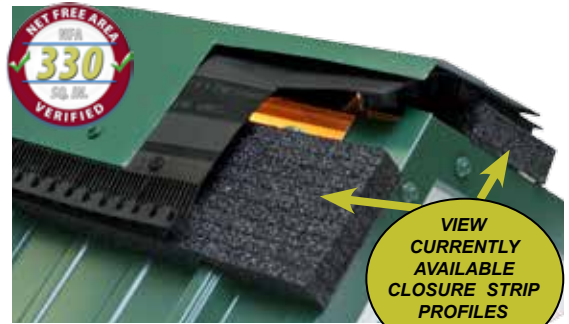


Profiles for Lomanco® Metal Roof Ridge Vent Kits

Lomanco®
Model
KIT34R9




3/4" Rib on 9" Centers

Lomanco®
Model
KIT5VP




5V Panel

Lomanco®
Model
KITSS116




1" Standing Seam on 16" Centers

Lomanco®
Model
KITRP



R-Panel

Lomanco®
Model
KIT34FR9



3/4" Flat Rib on 9" Centers



- ▶ Closure strip available to fit different profiles.
- ▶ Superior weather protection and performance without the restriction of filters or mesh.
- ▶ Adjusts from 2/12 to 16/12 roof pitches.
- ▶ Requires Lomanco® Lo-Omniroll 30' Ridge Vent. Sold separately. See page 5.

One installation kit required per *LOR-30 (30 foot) ridge vent.

Custom foam closure installation kits sold separately from *LOR-30 Lo-OmniRoll®. If you require a profile that is not shown contact Lomancoat 1.800.643.5596.



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Distinct Vent Solutions

LPR / VUR

Lomanco offers two styles of Aluminum Ridge Vents—the LPR and VUR. The LPR Ridge Vent is available in 8' or 10' sections and is adjustable to fit 3/12 to 12/12 roof pitches. The VUR Ridge Vent is available in 10' sections and is adjustable to fit 3/12 to 8/12 roof pitches.

Features—Lomanco's LPR and VUR Ridge Vents are made of

embossed aluminum finishes for added strength, extended paint life, and blending appearance with shingles. Both offer a high Net Free Area—18 square inches of NFA per foot.

Installation—The LPR and VUR are manufactured with pre-notched nail holes for easy installation. Both are one-piece construction and can be cut at desired

length at two-foot intervals. Hurricane straps and tight fitting, high density polyethylene foam end-plugs are available for both the LPR and VUR.

MIAMI-DADE COUNTY APPROVED

* Texas Department of Insurance "Windstorm" Approved

Available Colors




LPR

- ▶ Low profile blends with roof construction.
- ▶ Large 2-inch-wide nailing flange.
- ▶ Easy installation, male/female connections—no straps necessary.
- ▶ Optional strap available in all colors.
- ▶ LPR has an aerodynamic design revolutionary three-baffle system for complete weather protection.


Model	Section LTH.	Net Free Area (in. ²)
LPR-8*	8	144
LPR-10*	10	180
VUR-10*	10	180
V-Plug	—	—
L-Plug	—	—

*LPR and VUR hurricane straps are available.

Copper VUR



Available on special order

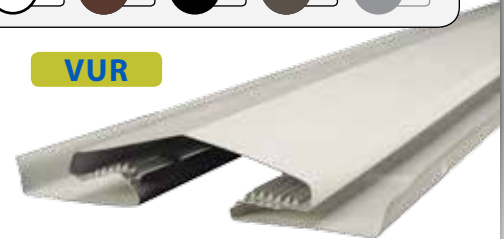

VUR

- ▶ Easy installation, male/female connections—no straps necessary.
- ▶ Engineered weather infiltration protectors at each connection.
- ▶ Exterior wind baffles.

L-PLUG

V-PLUG



Omni-Wall™

The Lomanco® Omni-Wall™ Shingle Over Vent offers functional ventilation for where your roof joins a wall. The OW-4 may also be used in a contemporary shed roof (mono-slope/single-slope) application.

Features—The OW-4 is designed for maximum weather protection, offering internal aerodynamic curved baffles with external perpendicular omni baffles. An external water shield and four drain holes per foot are also incorporated into the design of the vent. The OW-4 offers 9 square inches of Net Free Area per linear

foot and comes with a with a Lifetime Limited Warranty.

Installation—The OW-4 is designed to fit any roof pitch from a 2/12 to a 16/12. Installation is made easy with supported nail holes, molded nail lines, alignment tabs, slot width guide lines, and molded-in end plugs.




CSA-approved 83070

- ▶ Weatherproof underlapping joint.
- ▶ External venturi baffle.
- ▶ Supported nail holes.
- ▶ High grade, high impact UV resistant material.
- ▶ Lifetime limited warranty.

Model	Section LTH.	Net Free Area (in. ²)
OW-4	4'	36

If ridge vents are used on homes with multiple ridge line heights, it may be desirable to separate the attic areas with sheathing or wood where the ridge lines change. Avoid placing ridge vents on dormers when they are lower than the main ridge. This will eliminate the lower vent acting as an intake. Ridge vents are not recommended to run on the hip of a roof.



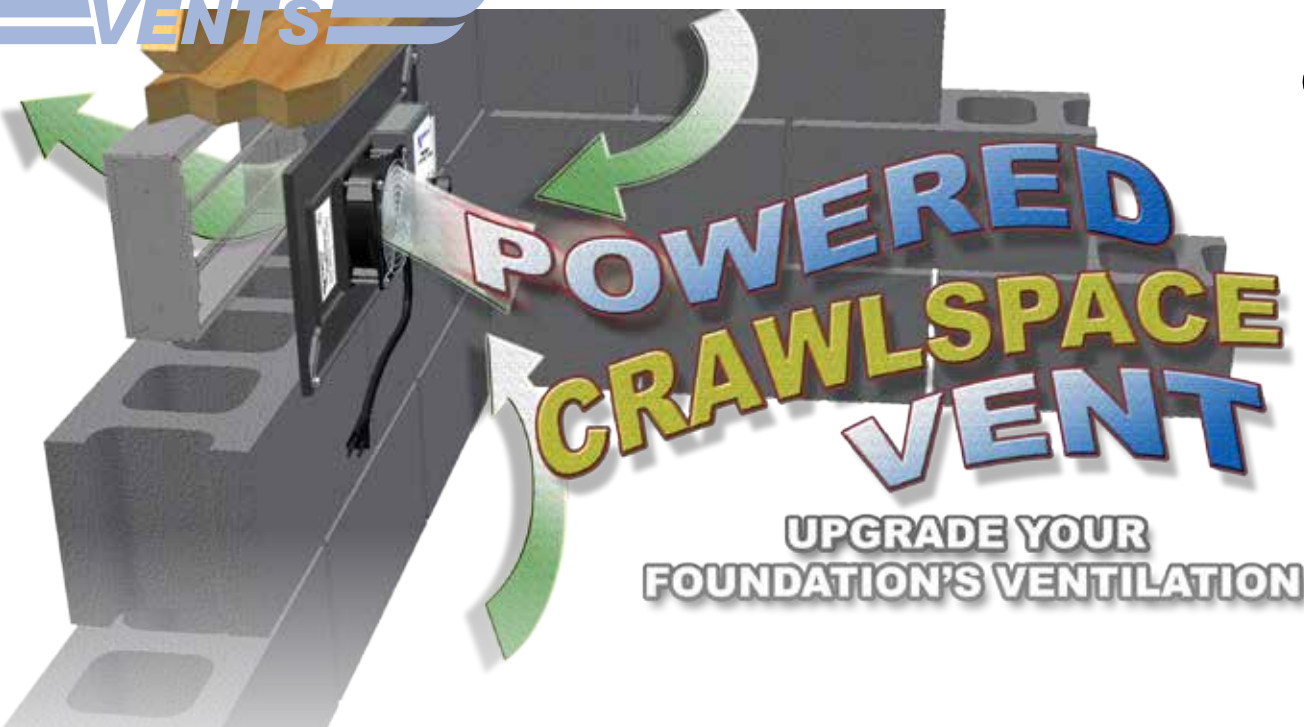

**UPGRADE YOUR
FOUNDATION'S VENTILATION**

Powered Crawlspace Vent

The Lomanco® Powered Crawlspace Vent (PCV1) is a quick and simple solution for under-ventilated crawlspaces. The PCV1 upgrades your present foundation vent and dries the crawlspace gradually. The PCV1 is made of tough polypropylene construction.

Installation—The PCV1 mounts behind an existing foundation vent for invisible operation and offers easy installation in a variety of constructions.

- ▶ Quiet 110 CFM ball bearing motor.
- ▶ Humidity sensor for worry free operation.
- ▶ Thermostat shuts fan off at low temperatures.
- ▶ U.L. approved means assured safety.
- ▶ Can help stop mold growth.
- ▶ Upgrades your present foundation vent.
- ▶ One year limited warranty.

Model	Size (in.)	Cubic Feet Louver Ventilates
PCV1	9 x 19 x 3	1650



CSA-approved
83070



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Distinct Vent Solutions

EVA-34 & EVA Combo Vent


Lomanco offers an exhaust vent adapter for our Static Roof Vent Series. The EVA-34 works with any Static Roof Vent while blending with existing accessories. The EVA-34 is designed to fit a 3" or 4" flexible duct. The EVA Combo Vent is a Lomanco® 730 Static Roof Vent that comes with an EVA-34 adapter.

Installation—The EVA-34 is ideal for new construction and can be a solution for existing homes as well. The EVA-34 can be installed from the top of the roof deck or from inside the attic to the Static Roof Vent or to a Cornice Vent in the soffit area.

15




EVA-34



- ▶ Exhaust vent adapter fits 3" or 4" flexible duct.
- ▶ Installs from top of deck or inside of attic to roof vent or cornice vent.
- ▶ Exhausts household moisture.
- ▶ Tested for all climates.
- ▶ Built in damper prevents backdraft.
- ▶ Works with any roof system.
- ▶ Ideal for new construction.
- ▶ Solution for existing homes.
- ▶ Blends with existing accessories.
- ▶ 10" nailing flange.

Model	Size (in.)	Fits
EVA-34	10x10 x 3¼	3" or 4"

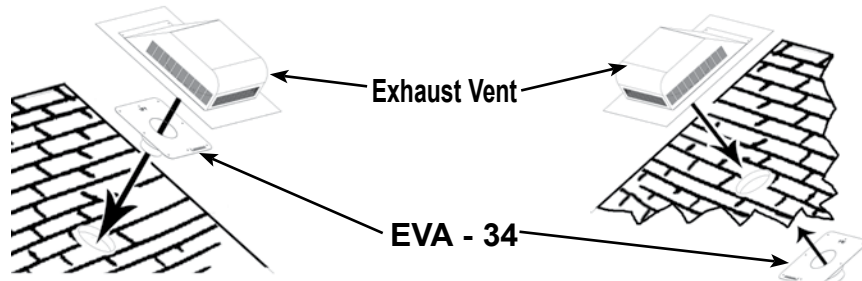

Cupola & Weather Vanes

The Lomanco® DRB-24 Cupola offers an elegant answer to your ventilation needs. The DRB-24 is made of all aluminum construction. A built in rain shield and an 8x8 perma-coated screen are engineered into the design to assure maximum weather protection.


Installation—The DRB-24 has a vari-pitch base that adjusts from a 2/12 to a 6/12 roof pitch. It is installed over a 17" by 17" hole, straddling the roof peak. Weather vanes are also available in four styles and are sold separately.



Model	Size (in.)	NFA (in. ²)
DRB-24	24 x 24 x 24	254
WV-74-HA	—	—
WV-73-DA	—	—
WV-76-RA	—	—
WV-77-SA	—	—
Clutch Base	—	—

Weather Vane Features

- ▶ Cast aluminum with black enamel finish.
- ▶ Four styles available.
- ▶ Weather vanes include ornament pole and directional.
- ▶ Measures 24¼" high and arrow under the main figure is 18½" long.
- ▶ Clutch bases are available from Lomanco on special order. For use on pitch roof when not using a cupola.

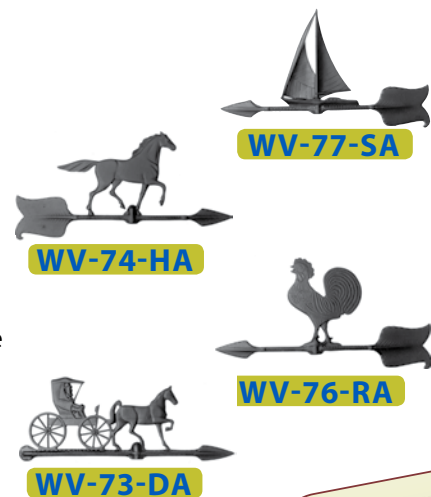

Adding a ventilation system to your foundation can bring your home into compliance with building codes. And remember, when installing kitchen and bathroom fans, DO NOT vent them into the attic space. These heat and moisture sources must be ventilated outside.



TileRidge® Vent




TRV-4

Lomanco's TRV-4 TileRidge® exhaust vent provides proper and functional attic ventilation for tile roofs (compatible with high and medium profile "S" tile roofs with 2" x 6" ridge pole at this time). The excellent airflow design of the TileRidge® affords superior weather protection with no filter to clog.

Features—The TRV-4 is made of a tough, durable engineered material that guarantees longevity backed with a 30 year transferrable warranty. The TileRidge® can be used with any intake vent that will provide the proper amount of NFA for a balanced system. If possible, Lomanco recommends using the TileRidge® exhaust vent with the TileIntake® intake vent for a complete Tile Roof Ventilation system.

Installation—The TileRidge® design and installation method allows the vent to be completely concealed under the cap tile. Installation will work with mortar or other approved weather blocking material. Since the vent is installed on each side of the ridge pole, the Net Free Area (NFA) is 9 square inches per side, per linear foot. This equals 18 square inches of NFA per linear foot of installed vent. The bottom integrated hinge allows the vent to be installed on 2/12 through 8/12 roof pitches.

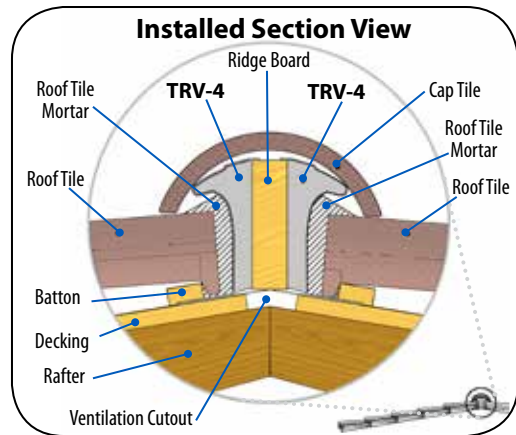

- ▶ Functional and concealed ventilation installed under the cap tile.
- ▶ Works on high & medium profile "s" tile roofs with 2" x 6" ridge pole.
- ▶ Interlocking self alignment design with weatherproof over lapping joint.
- ▶ Works with mortar or other approved weather blocking material.
- ▶ 18 inches Net Free Area per linear foot of installed vent. 9 square inches per side.
- ▶ Molded-in weep openings, nail holes and end plug.
- ▶ Internal water shield.
- ▶ Also available in **CLASS A FIRE RATING**.
- ▶ 30 year transferrable warranty.

How many Tile Vents do you need?

Attic floor space in square feet.
1000 | 1500 | 2000 | 2500 | 3000 | 3500

TILERIDGE® EXHAUST SYSTEM

TRV-4 8 10 14 18 20 24

TILEINTAKE® VENT SYSTEM

IV-9 8 10 14 18 20 24

Model	LTH. (ft.)	NFA (in. ²)
TRV-4	4	36
TRV-4FR	4	36

MIAMI-DADE COUNTY
APPROVED


Omni Solar Vent for Tile Roofs

Lomanco's Omni Solar Vent™ is your attic's best choice for solar powered protection against heat and moisture from sun-up to sun-down. Use the power of the sun to cool your attic! It is the **PROVEN BEST PERFORMER** for solar powered attic ventilation.

Features—The Omni Solar Vent™ has a unique, sleek design that blends well with roof profiles. Its design makes it impossible for birds or other pests to get into the attic through our vent.

Installation—The Omni Solar Vent™ is a great option for your tile roof. To install the Omni Solar Vent™ on a tile roof, the vent must be installed on a raised curb. The installation requires no electrician.

(See page 11 for additional information.)

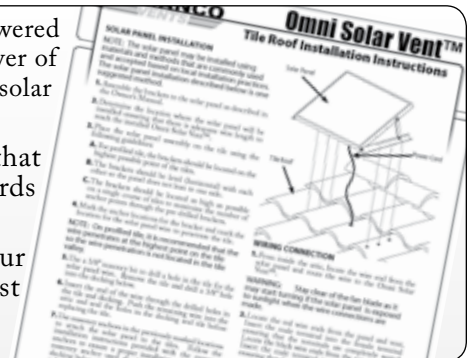

Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Tile Roof Vents

TileIntake® Vent




IV-9

Lomanco's IV-9 TileIntake® vent provides proper and functional intake of your attic space for tile roofs. The unique design and installation method insures complete invisibility. The IV-9 works on all tile roofs with use of a batten system.

Features—The TileIntake® vent has excellent airflow design with superior weather protection and no filter to clog. Each vent features interlocking self alignment designs with weatherproof over lapping joints. The TileIntake® can be used with any exhaust vent that provides the proper amount of NFA for a balanced ventilation system. If possible, Lomanco recommends using the TileRidge® exhaust vent with the TileIntake® intake vent for a complete Tile Roof Ventilation system.

Installation—The TileIntake® vent is installed underneath the tiles and gets outside make-up air from the airspace between the roof tiles and the roof decking. A constant air supply is provided to this space from the permeability of the tile roof itself. The Tile Roof Institute states, "Natural air ventilation under the tile creates a heat transfer barrier that can provide the benefit of a cooler house in the summer and a warmer house in the winter." The Lomanco® TileIntake® not only utilizes this natural air ventilation, but will also increase the circulation of the air in the batten space. This will influence the dispersion of moisture and energy performance of the roof.

Installation—The TileIntake® vent will work on 2/12 and up roof pitches. The vent is molded in 4 foot lengths with a NFA of 9 square inches per linear foot. Alternate installation methods that require no batten system are available.

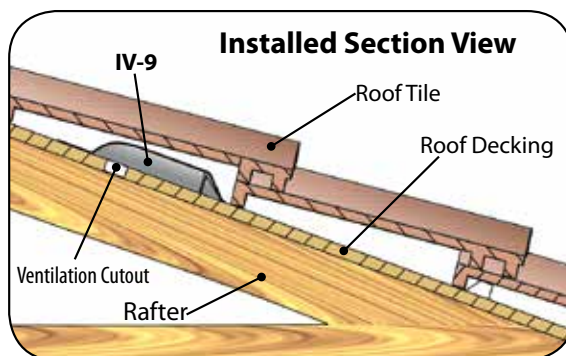

- ▶ Complete invisibility when installed.
- ▶ Aerodynamically curved internal baffles to minimize wind resistance.
- ▶ Excellent airflow design with superior weather protection and no filter to clog.
- ▶ Tough durable construction.
- ▶ Interlocking self alignment design with weatherproof overlapping joint.
- ▶ Quick, easy installation.
- ▶ Works on all tile roofs with use of a batten system.
- ▶ 9 inches Net Free Area per linear foot.
- ▶ Supported molded in nail holes.
- ▶ Molded-in weep openings, nail holes and end plug.
- ▶ Cut line provided for two foot lengths.
- ▶ Engineered material guarantees longevity.
- ▶ 30 year transferable warranty.

How many TileIntake® Vents do you need?

	Attic floor space in square feet.					
	1000	1500	2000	2500	3000	3500
TILERIDGE EXHAUST SYSTEM						
TRV-4	8	10	14	18	20	24
TILEINTAKE VENT SYSTEM						
IV-9	8	10	14	18	20	24

Model	LTH. (ft.)	NFA (in. ²)
IV-9	4	36

Tile Roof Turbine Vent



Lomanco offers a turbine option for your tile roof. Our BIB12TR & BEB12TR are approved for all tile and slate roof constructions.

Features—All Lomanco® Tile Roof Turbines come with a Lifetime Transferable Warranty. Simply put, you can't buy a better turbine.

Installation—The Tile Roof Turbine's large flashing makes installation easy. The Tile Roof Turbine's exclusive vari-pitch base adjusts to a 12/12 roof pitch. (See pages 8-9 for additional information.)



You can now have a proper attic ventilation system for a tile roof that is completely invisible when installed. This is definitely something that was never available before and is something every home owner with a tile roof will prefer. Lomanco® recommends using the TileRidge® exhaust vent with the TileIntake® vent for a complete Tile Roof Ventilation system.



About Intake Ventilation

Inadequate intake is the #1 cause of failure of the attic ventilation system. Specifically, inadequate intake results in extreme heat buildup in the summer and severe weather infiltration and moisture problems in the winter.

The intake system must provide as much as or more than the exhaust system in Net Free Area.

Proper vent chutes should be installed before blown in insulation, to prevent choking your intake system. A good rule of thumb is to place one between each set of rafter tails in order to maximize intake air.

If maintenance free vinyl/metal under eave panels are used, the vented panels should be installed continuously around the under

eave portion of the house.

If the under eave width prohibits the use of cornice or strip vents—never use an exhaust louver as an intake vent. The most logical solution would be to install SV-10.

Available Colors



CV-4 Only
SV-10 Only SV-10 Only

Continuous Drip Edge Soffit Vent

- ▶ Offers two products in one: incorporates both drip edge vent and continuous soffit vent.
- ▶ All-aluminum construction.
- ▶ Perfect for homes built with little or no overhang.
- ▶ Can be cut to desired length at any point.
- ▶ The SV-10 is also available in copper.



Copper SV-10



Available on special order

C-Series Cornice Vents

C816



C616



C416



CR-8



- ▶ All-aluminum construction.
- ▶ 8x8 perma-coated aluminum screen attached.
- ▶ Pre-drilled nail holes.

- ▶ Unique "eyebrow" designed louvers provide maximum ventilating capacity with superior weather protection.
- ▶ Cornice-mounted companion product for all types of exhaust ventilators.

Model Number	General Specifications	Overall Size (in)	Hole Size (in.)	Net Free Area
C416	Screen & Louvers	4 x 16	3 x 15	25 SQ. IN.
C616	Screen & Louvers	6 x 16	5 x 15	37 SQ. IN.
C816	Screen & Louvers	8 x 16	7 x 15	65 SQ. IN.
CR-8	Screen & Louvers	8 Dia.	7 Dia.	13 SQ. IN.



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Intake Vent Systems

Continuous Soffit Vents



105

- ▶ 2 3/4" wide continuous strip.
- ▶ 1" x 1/8" louvered openings.



140

- ▶ 3 3/4" wide continuous strip.
- ▶ 1" x 1/8" louvered openings.



190

- ▶ 2 3/8" wide continuous strip.
- ▶ 1" x 1/8" louvered openings.
- ▶ Instead of two 3/8" channels, there is only one with the other edge turned up 90 degrees to allow for easier installation.

Model	LTH.(ft.)	WTH. (in.)	NFA (in. ²)
105	8	2 3/4	72
140	8	3 3/4	88
190	8	2 3/8	72
SV-10	10	—	63

- ▶ All-aluminum construction.
- ▶ Available in 8-foot sections and can be cut at 2-foot intervals.
- ▶ Mounting flange is recessed 3/8" for soffit board.

Copper 105



Available on special order

Cirk - L - Vents

- ▶ All-aluminum construction.
- ▶ 18x16 aluminum screen attached (except for D-16 which has louvers only—no screen).
- ▶ Unique "eyebrow" designed louvers provide maximum ventilating capacity with superior weather protection.
- ▶ Prevents paint peeling by removing moisture from wall cavities.
- ▶ Provides an outlet for air movement in small confined spaces.
- ▶ Easy installation (drill and pop in).



P-18



D-16



CV-1



C-25



L-38



CV-2



CV-3



CV-4

Model Number	General Specifications	Overall Size (in.)	Hole Size (in.)	Net Free Area
L-38	Screen & Louvers	3	2 1/2	1.63 SQ. IN
C-25	Screen only	3 3/16	2 1/2	2.34 SQ. IN
P-18	Screen & Louvers	1	3/4	0.20 SQ. IN
D-16	Louver only	1	3/4	0.44 SQ. IN
CV-4	Screen & Louvers	4 1/2	4	3.00 SQ. IN
CV-3	Screen & Louvers	3 1/2	3	2.57 SQ. IN
CV-2	Screen & Louvers	2 1/4	2	1.50 SQ. IN
CV-1	Screen & Louvers	1 1/4	1	0.23 SQ. IN

Copper CV-4



Available on special order

Inadequate intake is the NUMBER ONE reason a ventilation system fails. Don't forget to install air chutes between every rafter tail area to allow the maximum amount of soffit intake air into the attic area.



LOMANCO™ Gables Vents

VENTS™ Triangular Line

20

- ▶ A-Series is adjustable for steeper pitches.
- ▶ A-Series all-aluminum vari-pitch louver adjustable from 6/12 to 12/12 roof pitches.
- ▶ A Series & 900 Series have a unique blade design that provides maximum weather protection.
- ▶ 900 Series all-aluminum, vari-pitch louver. Adjustable from a 2½/12 to 9/12 roof pitches.
- ▶ 300 Series all-aluminum, twin section stationary louver. Two-piece complete louver with easy slip joint connectors. Applicable in sheds, knee walls, etc.
- ▶ 300 Series embossed painted finish for added strength, extended paint life, durability, and blending appearance.
- ▶ 8x8 perma-coated screen provided.
- ▶ Wide mounting flange.
- ▶ **Note:** A Series & 900 Series Chart available for specifications at each pitch adjustment.

Available Colors



How many Gable Vents do you need?

Your attic floor space to be ventilated in square feet.

1000 | 1500 | 2000 | 2500 | 3000 | 3500

GABLE VENT EXHAUST SYSTEM

905	2	NR	NR	NR	NR	NR
907	2	2	NR	NR	NR	NR
909	2	2	2	2	NR	NR
911	2	2	2	2	2	2
12X18	2	NR	NR	NR	NR	NR
14X24	2	NR	NR	NR	NR	NR
18X24	2	2	NR	NR	NR	NR
24X30	2	2	2	2	NR	NR

GABLE VENT INTAKE SYSTEM

C416	10	16	20	24	30	34
C616	8	10	14	18	20	24
C816	4	6	8	10	12	14
105/190	4	6	8	10	10	12
140	4	6	6	8	10	10
SV-10	4	6	8	10	12	14



Square Line

150 SERIES

100 SERIES



- ▶ 100 Series used for flush mounting.
- ▶ 200 Series used for recessed mounting. Ideal for homes with siding or brick.
- ▶ 150 Series can be mounted flush or recessed.
- ▶ 100 & 200 offer wide mounting flange.


Available Colors



200 SERIES

100

Used for flush mounting.



200

Used for recessed mounting. Ideal for homes with siding or brick.



150

Can be mounted flush or recessed.



Model	Frame LTH.	Adjustable Base LTH	NFA SQ. IN.
A50B	20¾"	36¾" - 28¾"	46 to 60
A56B	23¾"	42¾" - 33¾"	71 to 100
A88B	27¾"	49¾" - 39"	81 to 142
904	21¼"	41¾" - 34"	34 to 69
*905	26¼"	51¾" - 42"	57 to 117
906	31¼"	61¾" - 50"	86 to 181
*907	36¼"	71" - 58"	122 to 255
908	41¼"	80¾" - 66"	163 to 341
*909	46¼"	90½" - 74"	211 to 439
910	51¼"	100¾" - 82"	263 to 548
911	56¼"	110¾" - 90"	320 to 668

Model	Base LTH	Roof Pitch	Center Height (in)	NFA SQ. IN.
306-3	6	3/12	9	80
306-4	6	4/12	12	121
306-5	6	5/12	15	162
308-3	8	3/12	12	166
*308-4	8	4/12	16	242
*308-5	8	5/12	20	322
*308-6	8	6/12	24	408
310-3	10	3/12	15	273
*310-4	10	4/12	20	398
*310-5	10	5/12	25	523
310-6	10	6/12	30	605
312-3	12	3/12	18	416
312-4	12	4/12	24	609
312-5	12	5/12	30	805

* Recommended Stock Sizes

150 Series



Model (Hole Size)	Overall Size	NFA SQ. IN.
8 x 8	10" x 10"	19
12 x 12	14 x 14	49
12 x 18	14 x 20	79
14 x 24	16 x 26	128
18 x 24	20 x 26	147
24 x 30	26 x 32	285

100 & 200 Series

Model (Hole Size)	Overall Size	NFA SQ. IN.
8x8	11 x 11	22
8x12	11 x 15	36
8x16	11 x 19	51
*12x12	15 x 15	56
12x16	15 x 19	79
*12x18	15 x 21	90
12x24	15 x 27	124
14x18	17 x 21	106
*14x24	17 x 27	146
*18x24	21 x 27	190
24x14	27 x 17	140
24x24	27 x 27	256
*24x30	27 x 33	325
30x12	33 x 15	146
30x18	33 x 21	234
30x24	33 x 27	332



Scan this QR Code with your smartphone to instantly view the most current information on the vent of your choice.



Foundation Vents

Lomanco® Foundation Ventilation

Lomanco provides a complete line of Foundation Vents. Lomanco offers foundation vents in Plastic, Die-Cast Aluminum, and All-Aluminum Construction. Foundation vents are available in several styles- shutter style, hinged louver style, and

with a damper for tight closure.

Features—Lomanco® Foundation Vents are designed with an 8x8 perma-coated aluminum screen attached and are engineered for maximum weather protection. Most vents are available in the standard concrete block size- 16"x 8".

199
J209



- ▶ Polypropylene plastic.
- ▶ Easy working 2-slide shutter.
- ▶ J209 is larger in height to fit King and Queen Bricks.

Available Colors




106
106L
106S



- ▶ Die-cast aluminum.
- ▶ Aluminum damper for tight closure.
- ▶ 106-L has a 1-1/2" lintel on top for extra strength.
- ▶ 106-S does not have damper.

Available Colors MF Only

179



- ▶ Heavy die-cast aluminum.
- ▶ 3-slide shutter provides maximum ventilation.

Available Colors MF Only

189




- ▶ All-aluminum construction.
- ▶ Three hinged louvers.
- ▶ Embossed painted finish, available in black and brown, adds strength, extended paint life, and durability.
- ▶ 189G is available in galvanized mill finish only.

Available Colors



2711
2712



- ▶ Extruded aluminum construction.
- ▶ Deep louvered blades.
- ▶ Overlapping top and bottom.
- ▶ 2711 replaces a single brick.
- ▶ 2712 replaces a double brick.

Available Colors MF Only

142
142F



- ▶ All-aluminum construction.
- ▶ Two-slide shutter for maximum ventilation.
- ▶ Self-framed on all sides.
- ▶ 142F flush mount with pre-punched holes for ease of installation.
- ▶ 142F used as replacement of existing block vents, mobile home skirting, and portable buildings.

Available Colors



Model	Size (in.)	Description	NFA (in. ²)
106	16 x 8	Die-cast aluminum with aluminum damper	64
106L	16 x 8	Same as 106 with 1 1/2" lintel	64
106S	16 x 8	Same as 106 without damper	64
142	16 x 8	2-slide die-stamped aluminum, self-framed on all sides	46
142F	16 x 8	Same as 142 with flange	46
179	16 x 8	Die-cast aluminum, 3-slide shutter	56
189	16 x 8	All aluminum construction, 3-hinged louver	74
189G	16 x 8	Galvanized, 3-hinged louver	74
199	16 x 8	Polypropylene plastic, 2-slide shutter	39
J209	16 x 9 1/4	Polypropylene plastic, 2-slide shutter	47
2711	1 brick	Extruded aluminum overlapping top & bottom mortar ribs 7 7/8" x 2 3/8" x 3 3/8"	12
2712	2 brick	Extruded aluminum overlapping top & bottom mortar ribs 7 7/8" x 5 1/16" x 3 3/8"	23

How many Foundation Vents do you need?

Your attic floor space to be ventilated in square feet.

1000 | 1500 | 2000 | 2500 | 3000 | 3500

FOUNDATION VENT SYSTEM

106L	8	12	15	19	23	27
179	9	13	18	22	26	30
189	7	10	13	17	20	23
199	13	19	25	31	37	44
J209	11	16	21	26	31	36

Crawlspace ventilation should not be overlooked.

A properly installed crawlspace ventilation system will provide moisture control. This will help eliminate environments favorable to not only mold and mildew, but also termites and other insect populations.



Page	Model	CTN. QTY.	WT. CTN (lbs.)
4	LOR-30	1	16 ¼
4	LOR9-4	10	17
4	LOR9-4FR	10	17
4	OR-20	1	13 ⅔
4	OR-4	10	30 ½
6	730	6	7 ¼
6	750	6	11 ¼
6	750-G	6	21 ¾
6	750-E	6	15 ½
6	750 (Copper)	3	14 ¾
6	770	6	13 ½
6	770-D	4	17 ¼
6	700	6	11 ¾
6	845	6	10
6	865	6	13 ½
6	865-S	4	11
6	550	6	8
6	550-S	6	9 ¼
6	600	6	10 ½
6	600-D	4	13
6	600-S	4	8 ¼
6	135	2	14 ¼
8	B I B-12	1	6 ½
8	BEB-12	1	6 ¾
8	B I B-12TR	1	6 ¾
8	BEB-12TR	1	6 ¾
8	B I B-14	1	7 ½
8	BEB-14	1	7 ¾
8	T I B-12	1	4 ½
8	TEB-12	1	4 ¾
8	T I B-14	1	4 ¾
8	TEB-14	1	5
8	GT-12	1	9
8	GEB-12	1	9 ½
8	I B-8 (Top)	1	4
8	VP-8 (Bottom)	1	2 ¼
10	2000	1	14 ½
10	2000 (Copper)	1	21 ¼
10	2000TH	1	15 ¾
10	2000TH (Copper)	1	22 ½
10	1800	1	8 ½
11	OSV40	1	33
11	SGABLE40	1	22 ½
12	KIT34R9	1 Kit	13
12	KIT5VP	1 Kit	11 ½
12	KITSS116	1 Kit	13 ¾
12	KITRP	1 Kit	13 ¼
12	KIT34FR9	1 Kit	13 ¼
13	VUR-10	10	48
13	VUR-10 (Copper)	5	57 ½
13	V-PLUG	24	1 ¼
13	VUR-HSTRAP	18	1
13	LPR-10	10	66 ½
13	LPR-8	10	52 ½
13	L-PLUG	24	1
13	LPR-STRAP	18	1
13	LPR-HSTRAP	18	1 ¾
13	OW-4	10	30 ½

Page	Model	CTN. QTY.	WT. CTN (lbs.)
14	PCV1	6	27 ¼
15	EVACV	6 /MC	13 ¼
15	EVA-34	12	6
15	DRB-24	1	21
15	WV-74-HA	1	3
15	WV-73-DA	1	3
15	WV-76-RA	1	3
15	WV-77-SA	1	3
15	Clutch Base	1	1 ¼
16	TRV-4	12	20
16	TRV-4FR	12	20
17	IV-9	12	20 ¼

Page	Model	Inner CTN. QTY.	CTN. QTY.	WT. CTN (lbs.)
18	C416	12	72	13 ¼
18	C616	12	72	19
18	C816	12	72	23 ½
18	CR-8	12	36	5 ¼
18	SV-10		10	28 ¼
18	SV-10 (Copper)		5	36 ½
19	L-38	6	72	2 ¾
19	C-25	6	72	2 ¼
19	P-18	6	72	¾
19	D-16	6	72	½
19	CV-4	—	36	2 ¾
	CV-4 (Copper)	—	36	8
19	CV-3	6	72	3 ½
19	CV-2	6	72	2
19	CV-1	6	72	¾
19	105		36	21 ½
19	105 (Copper)		15	28 ½
19	140		36	28 ½
19	190		36	22 ¼

Page	Model	CTN. QTY.	WT. CTN (lbs.)
20	A50B	1	2 ½
20	A56B	1	3 ¼
20	A88B	1	4
20	904	1	2 ½
20	*905	1	3 ½
20	906	1	4 ¾
20	*907	1	6
20	908	1	8
20	*909	1	8 ¾
20	910	1	11
20	911	1	13 ½
20	306-3	1	4
20	306-4	1	3 ¾
20	306-5	1	4 ½
20	308-3	1	5
20	*308-4	1	6 ½
20	*308-5	1	7
20	*308-6	1	8
20	310-3	1	7 ¼
20	*310-4	1	8 ½
20	*310-5	1	10

Page	Model	CTN. QTY.	WT. CTN (lbs.)
20	310-6	1	11 ½
20	312-3	1	12
20	312-4	1	11 ½
20	312-5	1	14 ¼
20	150-8 x 8	12	4 ½
20	150-12 x 12	12	8 ½
20	150-12 x 18	12	11 ½
20	150-14 x 24	12	16 ¼
20	150-18 x 24	12	20 ¼
20	150-24 x 30	6	15 ¼
20	100-8x8	6	3 ¼
20	100-8x12	6	4
20	100-8x16	6	5
20	*100-12x12	6	5 ½
20	100-12x16	6	6 ¼
20	*100-12x18	6	7 ½
20	100-12x24	6	9 ¼
20	100-14x18	6	8 ¼
20	*100-14x24	6	10 ½
20	*100-18x24	6	12 ½
20	100-24x14	6	9 ¼
20	100-24x24	6	14 ½
20	*100-24x30	6	19 ¼
20	100-30x12	6	10 ½
20	100-30x18	6	13 ¾
20	100-30x24	6	18 ¾
20	200-8x8	6	3 ¾
20	200-8x12	6	4 ½
20	200-8x16	6	5 ½
20	*200-12x12	6	6 ¼
20	200-12x16	6	7 ½
20	*200-12x18	6	8 ¼
20	200-12x24	6	9 ¾
20	200-14x18	6	8 ¾
20	*200-14x24	6	11 ¾
20	*200-18x24	6	13 ¾
20	200-24x14	6	10 ½
20	200-24x24	6	16 ¾
20	*200-24x30	6	20 ½
20	200-30x12	6	12
20	200-30x18	6	16 ½
20	200-30x24	6	20
21	106	12	8 ½
21	106L	12	11 ¼
21	106S	12	6 ¼
21	142	12	6 ¼
21	142F	12	12
21	179	12	32
21	189	12	13 ¼
21	189G	12	13 ¼
21	199	12	18 ¾
21	J209	12	20 ¾
21	2711	12	10 ½
21	2712	12	15 ¼

* Recommended Gable Stock Sizes

Please call our customer service department at 1.800.643.5596 for any additional information, including shipping or broken carton details, on any of our quality ventilation products. Detailed warranty information available at lomanco.com.





Remember, a properly functioning ventilation system consists of INTAKE and EXHAUST ventilators. Please see the ventilation guide on each product page for the proper number of vents to achieve FHA Minimum Property Standards for attic ventilation.

Product Information

Ventilation Concepts & Troubleshooting Seminar

23

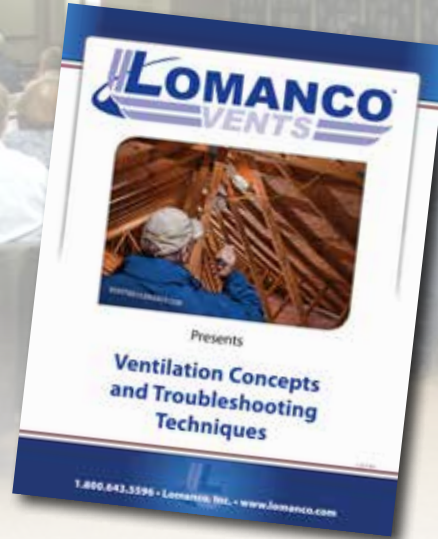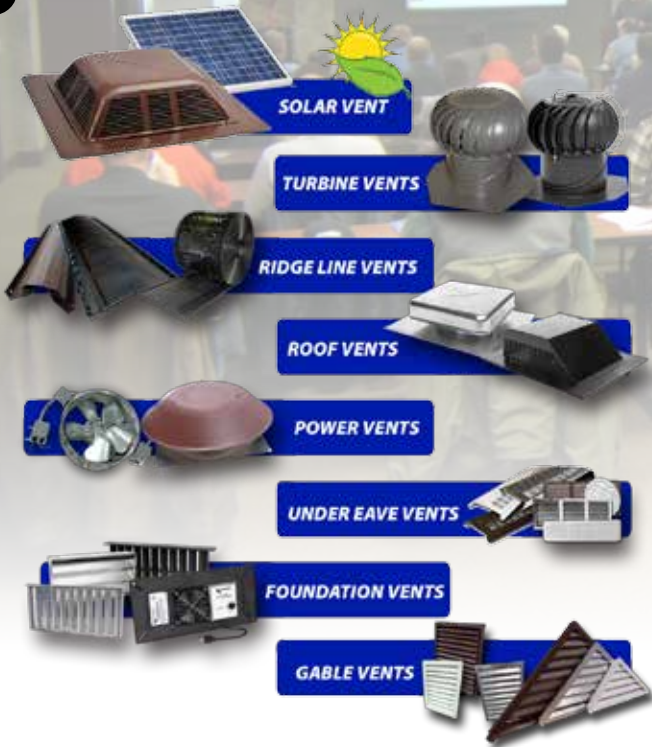

Lomanco® Ventilation Seminars are accredited for AIA continuing education credit hours. For information about scheduling a seminar contact your Area Market Manager or call 1.800.643.5596.

lomanco.com



Online Store



**Ventilation information you can trust is only
a call or click away!**

1.800.643.5596



You Tube

Scan this QR Code with your smartphone to join us on Facebook®, Twitter® or our YouTube® channel.



Lomanco® Social Media



LO196_0612a



Lomanco, Inc.
2101 West Main Street
PO Box 519
Jacksonville, AR 72076

501.982.6511
1.800.643.5596
Fax 501.982.1258

lomanco.com
facebook.com/lomanco
[twitter @lomanco](https://twitter.com/lomanco)

Masters in Home Ventilation Since 1946