

LOMANCO™ Tile Roof Whirlybird®

VENTS

Wind Powered Turbine Vents for Tile Roof Applications!



BIB-12TR



foreverguarantee

The Quality & Performance of the Lomanco® Whirlybird® Turbine is Guaranteed Forever




BEB-12TR

Tile Roof Turbine Features:

- ▶ Approved for all tile and slate roof constructions.
- ▶ Permanently lubricated upper and lower ball bearings that ensure long life and no maintenance.
- ▶ All-aluminum rust-free construction.
- ▶ Rigid spider-type structure.
- ▶ Riveted at every connection.
- ▶ 21 air-foil curved vanes with rolled edges to deflect water.
- ▶ Exclusive vari-pitch base adjusts up to 12/12 roof pitch.
- ▶ Large flashing for easy installation.
- ▶ Tested to withstand winds of 110 m.p.h.
- ▶ Forever Guarantee - residential use only.
- ▶ Easy installation.

BEARING FACTS

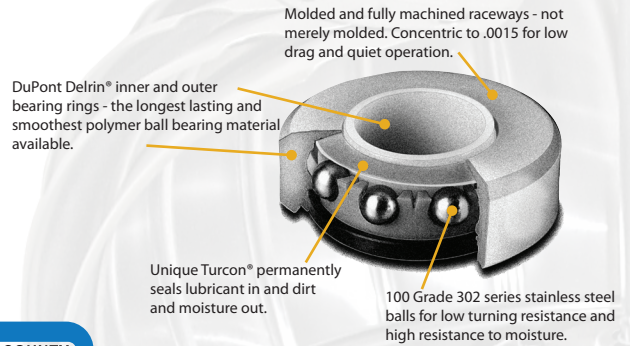

COLORS AVAILABLE



Weathered Bronze

White

Black

Brown

Mill Finish

Hurricane caps available!

Model	Hole Size	Height	Base
BIB-12TR	12	20¼"	20 x 20
BEB-12TR	12	20%	20 x 20

MIAMI-DADE COUNTY APPROVED
Lomanco, Inc.
Jacksonville, AR

*Texas Department of Insurance "Windstorm" Approved - Report # RV-12



Scan the QR Code

How many Whirlybirds® do you need?

Your attic floor space to be ventilated in square feet.

1000 1500 2000 2500 3000 3500

TURBINE VENT EXHAUST SYSTEM

BIB-12TR	2	2	3	4	4	5
BEB-12TR	2	2	3	4	4	5

TURBINE VENT INTAKE SYSTEM

C416	21	21	32	42	42	53
C616	15	15	22	29	29	36
C816	9	9	13	17	17	21
105/190	8	8	11	15	15	19
140	6	6	9	12	12	15
SV-10	9	9	13	17	17	21

LO462-1111

Find us on Facebook

Follow us on Twitter



1.800.643.5596 • Lomanco, Inc. • www.lomanco.com