




# INDUCTOR®

## IN-LINE DUCT FAN™

**IN-LINE™ FANS BOOST AIRFLOW TO ROOMS THAT ARE TOO HOT OR TOO COLD**

- Solves air delivery problems without major system rework or expense
- Can be installed at any angle
- Engineered for maximum boost and quiet operation
- Easy installation for metal or flex duct
- Saves on utility bills year round
- 9 MODELS AVAILABLE
- 1 year limited warranty

**Engineered for maximum boost and quiet operation. Motor 110V, Class B, Thermally Protected.**

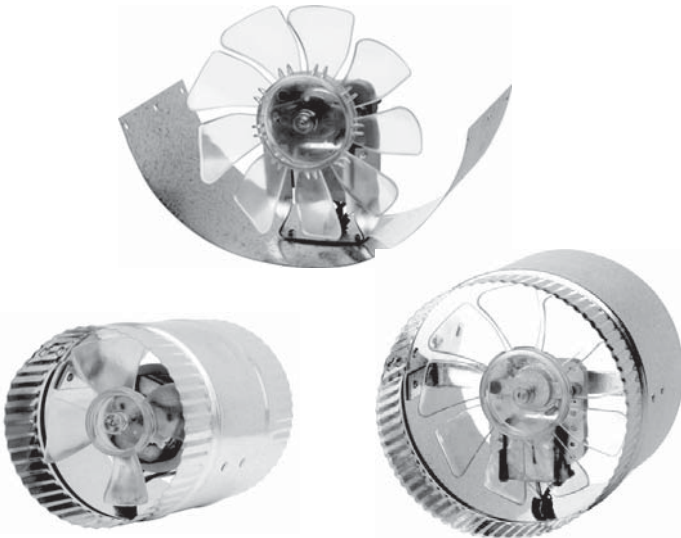

Model	Diameter	Blade	Max Boosted CFM	Free Air CFM	Watts	Amps	Sones	dBA
DB100	6" - 8"	Polycarbonate	250	160	30	0.35	2.2	50
★ DB200	6"	Polycarbonate	250	160	30	0.35	2.2	50
★ DB204	4"	Polycarbonate	80	65	30	0.30	2.4	52
DB205	5"	Polycarbonate	225	140	30	0.35	2.2	51
DB206	6"	Polycarbonate	250	160	30	0.35	2.4	52
DB208	8"	Polycarbonate	500	210	55	0.75	2.8	54
DB6GT	6"	Aluminum	350	180	55	0.75	4.0	60
DB210	10"	Aluminum	650	300	120	1.50	3.0	55
DB212	12"	Aluminum	800	650	120	1.50	3.0	55

**For automatic operation, see the optional DuctStat®, Plug-In Thermostat™.**

\* Both ends crimped.

The in-line duct fans can be speed controlled using the Suncourt VS100 solid state speed control.

Follow the installation instructions included with the VS100.

**NEVER USE A RHEOSTAT TO CONTROL FAN SPEED.**

Actual product appearance may differ from illustrations.

Suncourt reserves the right to modify any or all of its products' features, designs, components and specifications without notice.

Available at [www.hvacquick.com](http://www.hvacquick.com) 1-877-711-4822

**WWW.SUNCOURT.COM**

