



Air Circulators



High Velocity Floor Fans

Circulate Large Volumes of Air



Product Specifications

MODEL	Size	Spd	HP	RPM H/M/L	HZ	CFM @.0 SP H/M/L	CFM/WATT @.0 SP H/M/L	VOLTS
AFLR-12	12	3	.033	1565/1464/1309	60	1836/1469/1175	24/22/20	115
AFLR-20	20	3	1/8	1468/1209/1063	60	7562/6050/4840	34/31/28	115

MODEL	AMPS H/M/L	Drive	Blade	Cord	Color	Wt./lbs.	LxWxH
AFLR-12	1.02/0.75/0.64	DD	3-black	6'	Chrome & Black	10.58	15.16 x 6.1 x 13.78"
AFLR-20	2.06/1.65/1.34	DD	3-black	6'	Chrome & Black	23.14	24.6 x 10.2 x 24.0"

Features & Benefits

- Available in sizes 12" and 20"
- Composed of high grade steel construction material
- Factory balanced painted black aluminum blades
- Chrome guard with cord wrap and carry handle
- Adjustable to 110 degrees tilt knobs
- High velocity air movement
- Three speed, completely sealed and permanently lubricated ball bearings with thermal overload protection and rotary switch
- Fan can be wall-mounted
- Some assembly required
- Includes 6' cord
- One year warranty

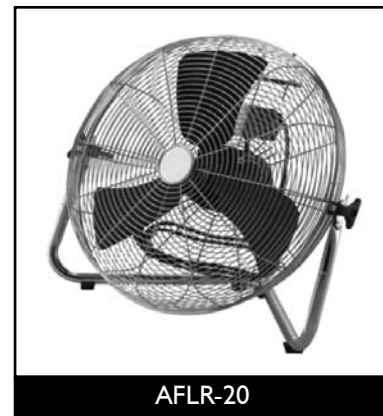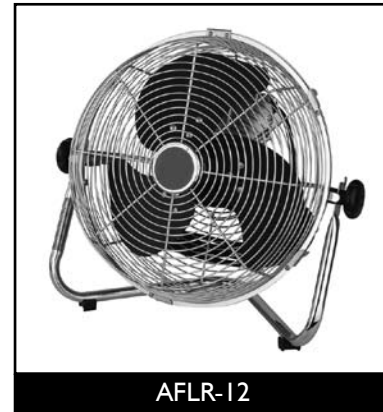



High Velocity Floor Fans

Totally Enclosed Motors


Product Specifications

MODEL	Size	Spd	HP	RPM H/M/L	HZ	CFM @.0 SP H/M/L	CFM/WATT @.0 SP H/M/L	VOLTS
CFLR-18	18	3	1/8	1565/1464/1309	60	6350/5390/4580	32/29/26	115
CLFR-24	24	3	1/8	1468/1209/1063	60	7750/6580/5590	34/31/28	115

MODEL	AMPS H/M/L	Drive	Blade	Cord	Color	Wt./lbs.	LxWxH
CFLR-18	1.5/1.4/1.3	DD	3-black	10'	Chrome & Black	19.36	22.85 x 22.05 x 10.16"
CLFR-24	1.7/1.5/1.2	DD	3-black	10'	Chrome & Black	27.50	29.53 x 27.56 x 13.78"

Features & Benefits

- Available in sizes 18" and 24"
- **Totally enclosed motors, stand up to all industrial and agricultural applications**
- Composed of high grade steel construction material
- Factory balanced painted black aluminum blades
- Chrome guard with cord wrap and carry handle
- Adjustable to 110 degrees tilt knobs
- High velocity air movement
- Three speed, completely sealed and permanently lubricated ball bearings with thermal overload protection and rotary switch
- Fan can be wall-mounted
- Includes 10' cord
- Some assembly required

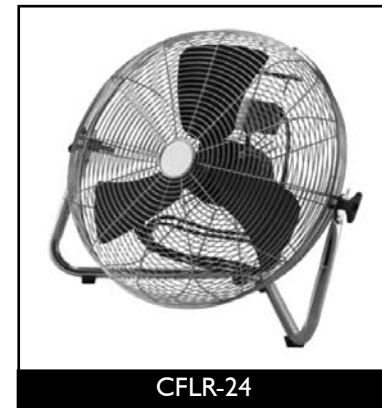



Standard Duty Pedestal Fans

Circulate Large Volumes of Air

Product Specifications

MODEL	Size	Spd	HP	RPM H/M/L	HZ	CFM @.0 SP High Speed	CFM/WATT @.0 SP H/M/L	VOLTS
ACIRPED-20	20	3	1/8	1468/1209/1063	60	7557	34/31/28	115
ACIRPED-24	24	3	1/10	1580/1240/830	60	10241	35/32/28	115
ACIRPED-30	30	3	1/6	1101/1034/859	60	9535	43/39/35	115

MODEL	AMPS H/M/L	Drive	Blade	Cord	Color	Wt./lbs.	LxWxH
ACIRPED-20	2.06/1.65/1.34	DD	3-black	9'	Chrome & Black	45.30	24.7 x 11.0 x 26.4"
ACIRPED-24	2.45/1.85/1.37	DD	3-black	9'	Chrome & Black	64.30	35.4 x 8.7 x 40.2"
ACIRPED-30	1.91/1.68/1.58	DD	3-black	9'	Chrome & Black	70.98	33.7 x 8.1 x 41.9"

Features & Benefits

- Available in sizes 20", 24" and 30"
- High velocity air movement
- Composed of high grade steel construction material
- Factory balanced painted black aluminum blades
- Painted black base and pole
- Adjustable height chrome plated extension pipe on 24" and 30" models
- Chrome plated guard
- Three speed, completely sealed and permanently lubricated ball bearings with thermal overload protection and pull chain
- 20" Pedestal fan is complete with wheels, pivoting head and cord wrap
- Height adjustment for 20" from 53" to 61"
- Height adjustment for 24" from 58" to 74"
- Height adjustment for 30" from 61" to 77"
- Some assembly required
- Includes 9' cord
- One year warranty



ACIRPED-20



ACIRPED-24



ACIRPED-30





UL507 Outdoor High Velocity Wallmount Fans

Circulate Large Volumes of Air


Product Specifications

MODEL	Size	Spd	HP	RPM H/M/L	HZ	CFM @.0 SP H/M/L	CFM/WATT @.0 SP H/M/L	VOLTS
UL507-18	18	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	115

MODEL	AMPS H/M/L	Drive	Blade	Cord	Color	Wt./lbs.	LxWxH
UL507-18	1.45/1.35/1.27	DD	3-white	12'	White	22.70	23.8 x 10 x 22.4

Features & Benefits

- High velocity air movement
- Composed of high grade steel construction material
- Factory balanced powder coated white aluminum blades
- UL507 tested and rated for use with misting and fogging rings for indoor and outdoor use
- Fan head tiltable to 105 degrees
- Powder coated white finish for corrosion resistant
- Three speed, completely sealed and permanently lubricated ball bearings with thermal overload protection and pull chain
- Adjustable wall mount bracket pivots up to 140 degrees
- Some assembly required
- Includes 12' cord
- One year warranty

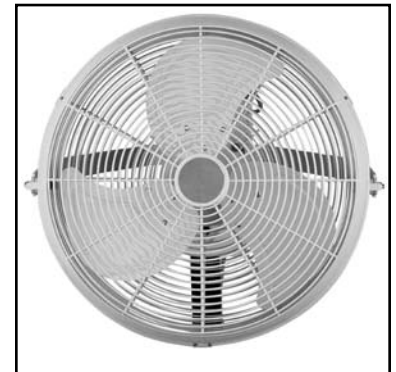

UL507-Series





UL507 Outdoor High Velocity Pedestal Fans

Circulate Large Volumes of Air

Product Specifications

MODEL	Size	Spd	HP	RPM H/M/L	HZ	CFM @.0 SP H/M/L	CFM/WATT @.0 SP H/M/L	VOLTS
UL 507-30	30	3	1/4	1113/915/754	60	10418/8334/6668	37/33/30	115

MODEL	AMPS H/M/L	Drive	Blade	Cord	Color	Wt./lbs.	LxWxH
UL 507-30	2.2/1.58/1.36	DD	3-white	9'	White	72.82	34.6 x 10.8 x 41.3"

Features & Benefits

- High velocity air movement
- Composed of high grade steel construction material
- Factory balanced and powder coated for corrosion resistance white aluminum blades
- UL507 tested and rated for use with misting and fogging rings for indoor and outdoor use
- Three speed, completely sealed and permanently lubricated ball bearings with thermal overload protection and pull chain
- Powder coated white guard, blade, base and pole for corrosion resistance
- Adjustable height chrome plated extension pipe
- Height adjustment from 61" to 77"
- Some assembly required
- Includes 9' cord
- One year warranty






Industrial Duty Circulator Fans

Product Specifications

MODEL	Size	Spd	HP	RPM H/M/L	HZ	CFM @.0 SP H/M/L	WATTS H/M/L	VOLTS	Wt./ lbs.
BCIR-24	24	3	1/3	1580/1240/830	60	9000/7650/6500	280/203/166	115	42
BCIR-30	30	3	1/3	1100/1035/980	60	9150/7725/6565	285/207/170	115	51
BCIROSC-24	24	3	1/3	1580/1240/830	60	9000/7650/6500	280/203/166	115	44
BCIROSC-30	30	3	1/3	1100/1035/980	60	9150/7725/6565	285/207/170	115	53
BCIRPED-24	24	3	1/3	1580/1240/830	60	9000/7650/6500	280/203/166	115	63.5
BCIRPED-30	30	3	1/3	1100/1035/980	60	9150/7725/6565	285/207/170	115	72.5

MODEL	AMPS H/M/L	Drive	Blade	Cord	Color
BCIR-24	2.36/1.8/1.6	DD	3-Alum	12'	Chrome/Gray
BCIR-30	2.4/1.82/1.68	DD	3-Alum	12'	Chrome/Gray
BCIROSC-24	2.36/1.8/1.6	DD	3-Alum	12'	Chrome/Gray
BCIROSC-30	2.4/1.82/1.68	DD	3-Alum	12'	Chrome/Gray
BCIRPED-24	2.36/1.8/1.6	DD	3-Alum	12'	Chrome/Gray
BCIRPED-30	2.4/1.82/1.68	DD	3-Alum	12'	Chrome/Gray

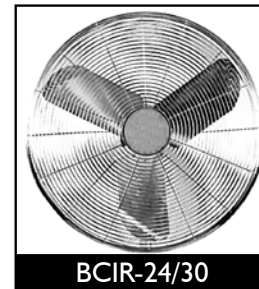

BCIR-24/30




BCIRPED-24/30

Features & Benefits

- Available in non-oscillating and oscillating sizes 24" and 30"
- Fan heads come completely assembled
- High velocity air movement
- Complete with 12' cord
- Chrome plated steel guards for strength
- Factory balanced corrosion resistance aluminium blades
- Oscillating fans can be oscillating or in a fixed position
- UL507 tested and rated for use with misting and fogging rings for indoor and outdoor use
- Three speed, completely sealed and permanently lubricated ball bearings with thermal overload protection and pull chain
- Wall mount and pedestal base are composed of high grade steel construction material
- Powder coated gray base and pole for corrosion resistance
- Adjustable height chrome plated extension pipe in pedestal poles
- Some assembly required, pedestals and heads ship knocked down
- One year warranty

*Sold Separately

Accy.	Descr.	Wt./ lbs.	Color
*WB	Wall Mount	0.77	Gray
*CM	Ceiling Mount	9.0	Gray
*IB	I-Beam	3.0	Gray
*PB	Pedestal Base & Pole	15.5	Gray

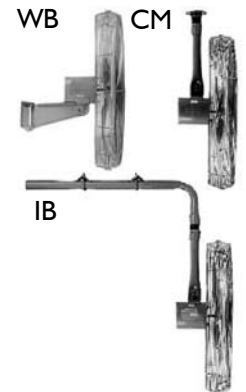



Premium Duty Circulator Fans

Circulate Large Volumes of Air

Product Specifications

MODEL	Size	Spd	HP	RPM	HZ	Ph	CFM @.0 SP Hi/Lo	CFM/ WATT @.0 SP	VOLTS
CCIR-12	12	VAR	1/10	1725	60	1	1600/560	11	115
CCIR-20	20	VAR	1/3	1725	60	1	6200/2170	16	115
CCIR-24	24	VAR	1/2	1725	60	1	8600/3010	17	115
CCIR-30	30	VAR	1/2	850	60	1	10,200/3570	20	115

MODEL	AMPS Hi/Lo	Drive	Blade	Cord	Wt./lbs.	LxWxH
CCIR-12	1.0	DD	3-Alum	9'	18.76	15 x 15 x 11"
CCIR-20	3.5	DD	3-Alum	9'	32.25	31 x 23.5 x 8"
CCIR-24	4.8	DD	3-Alum	9'	42.68	34 x 27.5 x 8"
CCIR-30	6.0	DD	3-Alum	9'	50.13	40 x 34.5 x 8"

Features & Benefits

- Standard OSHA safety guards on intake and exhaust
- Polyester powder coated guards for corrosion resistance
- Versatile wall and ceiling mount pivots 180 degrees and fan can turn 360°
- Motors are totally enclosed, high efficiency with sealed ball bearing
- Well balanced and strong blade design for years of trouble free service
- Variable speed operation
- Easy to clean and has no corners for build-up of dirt and bacteria
- Includes 9' cord
- No Assembly required
- One year warranty





High Volume Circulator Fans

Circulate Large Volumes of Air


Product Specifications

MODEL	Size	Spd	HP	RPM	HZ	Ph	CFM @.0 SP H/M/L	CFM/ WATT @.0 SP	FPM @ 50'	FPM @ 100'
AHPCIR-20	20	VAR	1/3	1725	60	1	6400/2241	17	450	150
AHPCIR-24	24	VAR	1/2	1725	60	1	8800/3081	18	550	200
AHPCIR-36	36	1	1/2	825	60	1	14000	26	700	350
AHPCIR-363P	36	1	1/2	850	60	3	14000	26	700	350

MODEL	VOLTS	AMPS H/M/L	Drive	Blade	Cord	Wt./lbs.	LxWxH
AHPCIR-20	115	3.5	DD	3-Alum	9'	36.31	31 x 23.5 x 8"
AHPCIR-24	115	4.8	DD	3-Alum	9'	46.3	34 x 27.5 x 8"
AHPCIR-36	115/230	6.0/3.0	DD	3-Galv	N/A	73.35	46 x 39.5 x 8"
AHPCIR-363P	230/460	1.8/0.9	DD	3-Galv	N/A	73.35	46 x 39.5 x 8"

Features & Benefits

- Available in sizes 20", 24" and 36"
- Standard OSHA safety guards on intake and exhaust
- Polyester powder coated guards for corrosion resistance
- Versatile wall and ceiling mount pivots 180 degrees and fan can turn 360 degrees
- Motors are totally enclosed, high efficiency with sealed ball bearings
- Most powerful basket fans in the market today based on size and motor horsepower
- Well balanced and strong blade design for years of trouble free service
- Designed for optimum airflow and coverage
- Industry leading fan efficiency, up to 26 CFM /Watt
- Easy to clean and has no corners for build-up of dirt and bacteria
- No assembly required
- 20" and 24" include 9' cord
- One year warranty

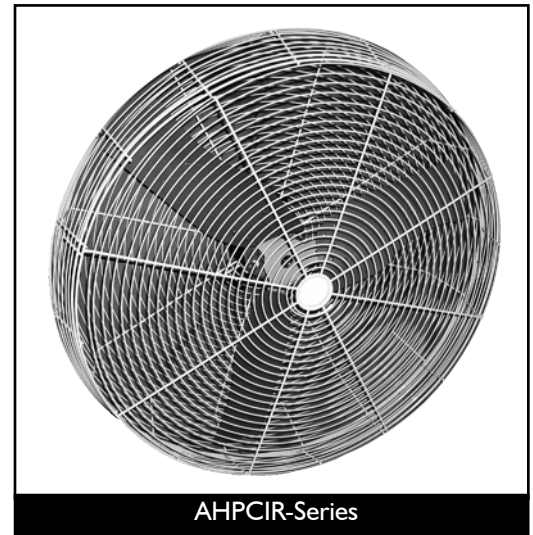

Soler & Palau USA • 6393 Powers Ave. • Jacksonville, FL 32217 • 800.961.7370

www.solerpalau-usa.com

8 Economical • High Velocity • Easy to Move



High Velocity Portable Man Coolers

Totally Enclosed Motors

Product Specifications

MODEL	Size	Spd	HP	RPM	HZ	CFM @.0 SP H/L	CFM/ WATT @.0 SP	VOLTS
AMAN-30	30	2	1/2	1057/722	60	10600/7650	37/33	115
AMAN-36	36	2	1/2	850/750	60	15114/10980	27/24	115
AMAN-42	42	1	1/2	860	60	18251	30	115

MODEL	AMPS Hi/Lo	Drive	Blade	Cord	Wt./lbs.	LxWxH
AMAN-30	2.4/1.68	DD	3-Gray	10	64.2	34.65 x 14.97 x 33.5"
AMAN-36	4.8/4.5	DD	3-Alum	12	96.8	41.34 x 14.97 x 39.37"
AMAN-42	5.8	DD	3-Alum	12	112.2	47.85 x 14.97 x 46.26"

Features & Benefits

- Available in sizes 30", 36" and 42"
- Composed of high grade steel construction material
- Factory balanced aluminum blades
- Cord wrap and carry handle
- OSHA approved safety guards
- Powder coated finish
- High velocity air movement
- Totally enclosed motors, stand up to all industrial and agricultural applications
- Completely sealed and permanently lubricated ball bearings with thermal overload protection and rotary switch
- Heavy-duty industrial hard rubber wheels (optional 8" pneumatic wheels available on the 36" and 42" models for an up charge)
- Some assembly required
- One year limited warranty

Totally enclosed motor



AMAN 36



AMAN 42



Soler & Palau USA • 6393 Powers Ave. • Jacksonville, FL 32217 • 800.961.7370

www.solerpalau-usa.com

9 Economical • High Velocity • Easy to Move



High Velocity Portable Man Coolers

Totally Enclosed Motors

Product Specifications

MODEL	Size	Spd	HP	RPM H/L	HZ	CFM @.0 SP Hi/Lo	CFM/WATT @.0 SP	VOLTS
BMAN-24	24	2	1/6	1057/772	60	7770/5825	39/35	115
BMAN-30	30	2	1/2	1057/772	60	10600/7650	37/33	115
BMAN-36	36	2	1/2	850/750	60	15114/10980	27/24	115
BMAN-42	42	1	1/2	860(H)	60	18251(H)	30	115
BMAN-48	48	1	1	850(H)	60	23500(H)	-	115

MODEL	AMPS Hi/Lo	Drive	Blade	Cord	Wt./lbs.	LxWxH
BMAN-24	1.76/1.6	DD	3-gray	10'	46.29	30.7 x 13 x 30.7"
BMAN-30	2.41/1.68	DD	3-gray	10'	68.2	36.7 x 14.0 x 36.7
BMAN-36	4.8/4.5	DD	3-alum	12'	129.19	43.3 x 15.7 x 43.3"
BMAN-42	5.8	DD	3-alum	12'	159.83	49.2 x 15.7 x 49.2"
BMAN-48	10.91	DD	3-alum	12'	212.30	59.05 x 16.53 x 59.05

Features & Benefits

- Available in sizes 24", 30" and 42"
- Composed of high grade steel construction material
- Factory balanced aluminum blades
- Cord wrap and carry handle
- OSHA approved safety guards
- Adjustable to 110 degrees tilt knobs
- Powder coated finish
- High velocity air movement
- Totally enclosed motors, stand up to all industrial and agricultural applications
- Completely sealed and permanently lubricated ball bearings with thermal overload protection and rotary switch
- 30" and 42" can be wall-mounted
- Heavy-duty industrial hard rubber wheels (optional 8" pneumatic wheels available on the 30" and 42" models for an up charge)
- Fans may be tilted 360 degrees
- Heavy-duty construction cradle base
- Some assembly required
- One year warranty



Easily Adjustable/
Strong Locking



Convenient Dial Switch



BMAN-24



BMAN-30 & 36



BMAN-42 & 48



Soler & Palau USA • 6393 Powers Ave. • Jacksonville, FL 32217 • 800.961.7370

www.solerpalau-usa.com

10 Economical • High Velocity • Easy to Move



High Velocity Portable Man Coolers

Open Motors

Product Specifications


MODEL	Size	Spd	HP	RPM H/L	HZ	CFM @.0 SP Hi/Lo	CFM/WATT @.0 SP	VOLTS
CMAN-36	36	2	1/2	825/700	60	13500/9700	27/23	115
CMAN-42	42	2	1/2	825/700	60	16000/13950	28/24	115
CMAN-B36	36	2	1/2	750/550	60	13500/9700	27/23	115
CMAN-B42	42	2	1/2	750/550	60	16000/13950	28/24	115

MODEL	AMPS Hi/Lo	Drive	Blade	Cord	Wt./lbs.	LxWxH
CMAN-36	3.8/2.8	DD	4-painted	9'	80	40.0 x 40.0 x 12.2
CMAN-42	4.5/3.7	DD	4-painted	9'	100	45.6 x 46.0 x 12.2
CMAN-B36	3.8/2.8	BD	4-painted	9'	82	40.0 x 40.0 x 12.2
CMAN-B42	4.5/3.7	BD	4-painted	9'	102	45.6 x 46.0 x 12.2

Features & Benefits

MODEL CMAN

- Attractive black coating
- UL/ULC certified
- 8" solid rubber wheels
- Plain housings available
- Special color orders available on container quantities
- Quiet operation
- Built in Hi/Lo switch
- Meets OSHA standards
- High velocity fan blade
- Direct drive models are virtually maintenance free
- Energy efficient motors are maintenance free
- One year limited warranty

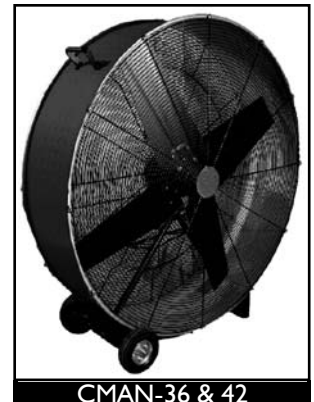

MODEL CMAN-B

- UL/ULC certified
- 8" solid rubber wheels
- Special color orders available on container quantities
- Quiet operation
- Built in Hi/Lo switch
- Meets OSHA standards
- High velocity fan blade
- Energy efficient motors are maintenance free
- One year limited warranty





Shutter Fans w/Cord

Circulate Large Volumes of Air


Product Specifications

MODEL	Size	Spd	HP	RPM	HZ	Ph	CFM @.0 SP Hi/Lo	CFM @.05 SP Hi/Lo	CFM @.10 SP Hi/Lo	CFM @.20 SP Hi/Lo	CFM per WATT @.0 SP
CSTR-12C	12	VAR	1/10	1725	60	1	1200/400	114/380	1080/360	900/300	11/9
CSTR-16	16	VAR	1/10	1725	60	1	2100/735	1995/700	1890/660	1575/550	15/13
CSTR-20	20	VAR	1/3	1725	60	1	5000/1750	4750/1665	4500/1575	3750/1315	18/14
CSTR-24	24	VAR	1/2	1725	60	1	6250/2200	5940/2080	5625/1970	4690/1640	18/14

MODEL	VOLTS	AMPS Hi/Lo	Drive	Blade	Cord	Wt./lbs.	LxWxH
CSTR-12C	115	1.0	DD	3-Alum	9'	22.40	16 x 16 x 13"
CSTR-16	115/230	1.0/0.05	DD	3-Alum	No	25.75	20 x 20 x 13"
CSTR-20	115/230	3.5/1.7	DD	3-Alum	No	35.94	24 x 24 x 13"
CSTR-24	115/230	4.8/2.4	DD	3-Alum	No	47.06	28 x 28 x 14.5"

Features & Benefits

- Totally assembled
- Motor is totally enclosed maintenance free, high efficiency, sealed ball bearings and UL/ULC certified
- Corrosion resistant aluminum shutter with tie bar to reduce shutter flapping and opening on windy days
- One year limited warranty
- Safety chrome grill on intake side meets OSHA standards.
Fan must be mounted 7' above ground level on the exhaust side
- Includes cord on 12" only

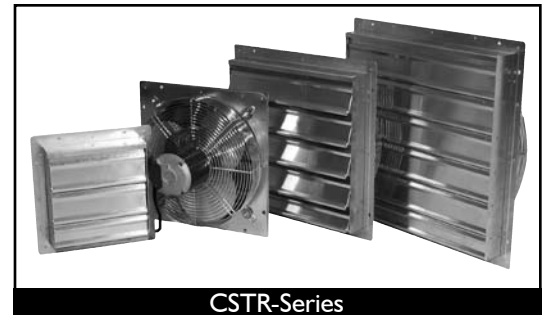




Industrial Ceiling Fans

Product Specifications

MODEL	Size	Airflow	Max RPM	Air Velocity 5' from fan	CFM	WATTS H/L	AMPS	Downrod Length	Weight
IF48C	48	Downdraft	320	700	18000	70/20	0.7	24	20
IF56C	56	Downdraft	310	660	21000	90/20	0.8	24	23
IFR56	56	Forward/Reverse	310	660	21000	90/20	0.8	24	23
HPWR56	56	Downdraft	319	660	28000	110/30	0.95	24	27
HPWR60	60	Forward/Reverse	292	650	28000	110/30	0.95	24	29

Features & Benefits

- Sealed bearings no maintenance required
- Extra 24" lead wires coming out of fan for easy adapting to longer downrods
- 24" stainless steel safety cable
- Low energy consumption maintenance free motors
- 24" standard downrod length
- Painted aluminum blades
- WR series has water resistant motors
- Quiet operation
- UL approved

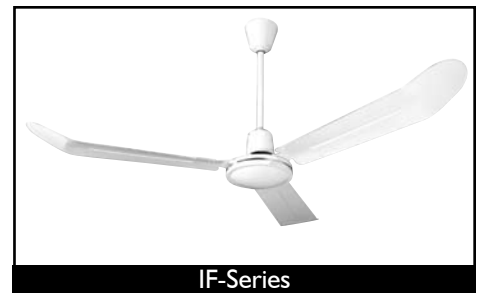

IF-Series



HP-Series

Applications

- All models are ideal for factories, warehouses, retail stores & garages
- The WR water resistant and high performance is ideal agricultural, greenhouse and high moisture application
- Heat de-stratification.
- Insect control
- Air curtain for shipping doors
- Employee, machine and compressor cooling
- By removing hot air from the ceiling you can increase light & ballast life





Product Specifications

MODEL	HP	RPM H/M/L	CFM	WATTS H/M/L	AMPS H/M/L	Wt./lbs.	LxWxH
CD4000	1/2	1050/950/750	2500	570/460/380	5.5/4.4/3.8	41.88	20.86 x 20.07 x 21.26

Features & Benefits

- 3-Speed rotary switch
- 40 mm thick and 139 mm OD stator motor.
- Built-in cord wrap
- Multi-angle air flow
- Convenient carrying handle
- Silicon steel construction
- Durable galvanized blades & blower wheel

Applications

- Drying Carpets, hardwood floors, upholstery etc.
- Perfect for use after fire, flood, or other water damage.
- Also great for drying wet floors during rainy or snowy seasons.
- Suitable for both indoor and outdoor use in commercial, industrial, agricultural and automotive workshops.
- Ventilates hot or enclosed areas.



CD4000





Soler & Palau USA
6393 Powers Avenue
Jacksonville, FL 32217
P: 800.961.7370
F: 800.961.7379

www.solerpalau-usa.com
customerservice@solerpalau-usa.com

Air Circulators