




- Horizontal adjustable curved blades on 1" spacing.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame and roll-formed aluminum blades.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 22" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

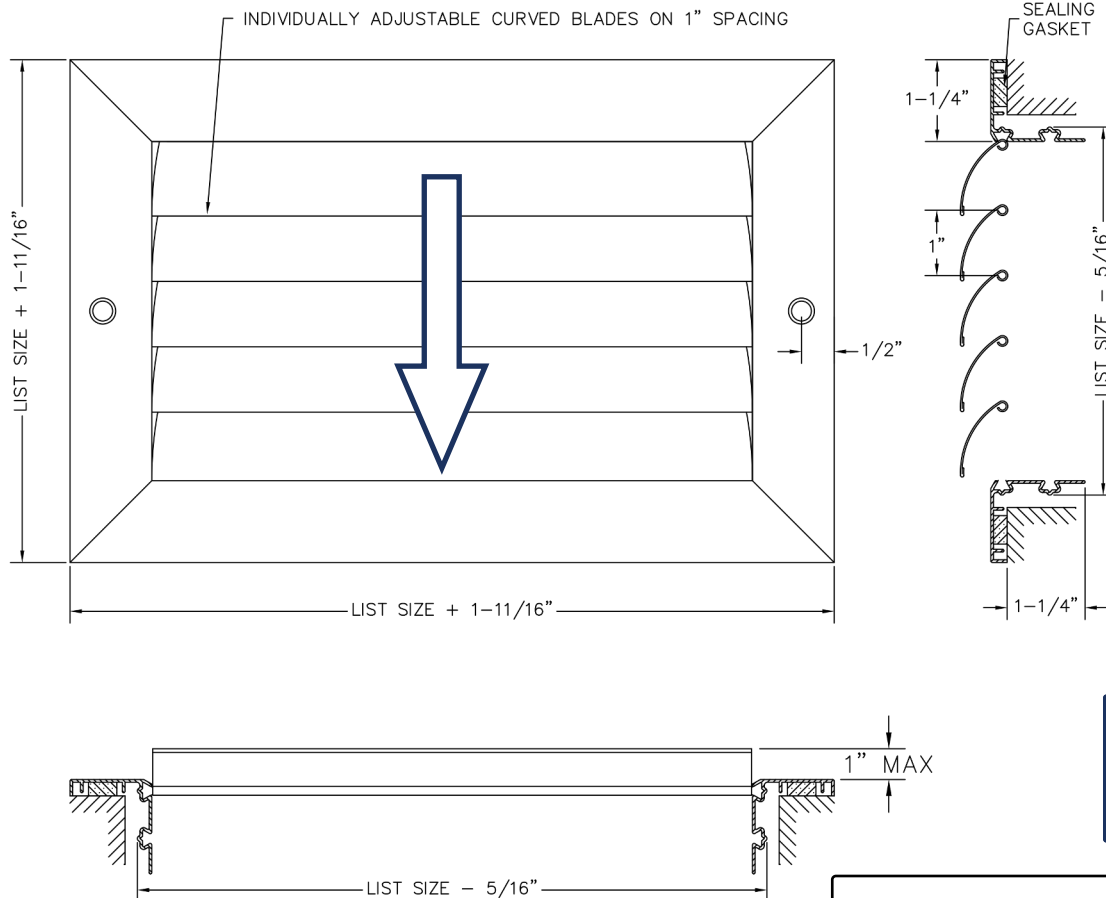

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Options

- ☐ D - Opposed Blade Damper
- ☐ M - Multi-Shutter Damper
- ☐ TB - No Screw Holes
- ☐ AA - All Aluminum

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W White
S Silver
M Mill


3. Select a Lead Time

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

Project / Location: _____
Architect: _____
Engineer: _____
Contractor: _____


BLADE OPTIONS

Standard
No additional option

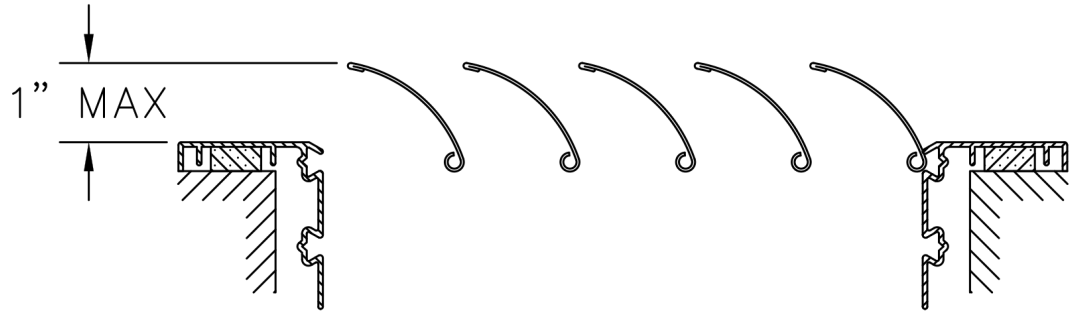

Standard Blade option can extend up to 1" out of the frame.

-R
Recessed Blades

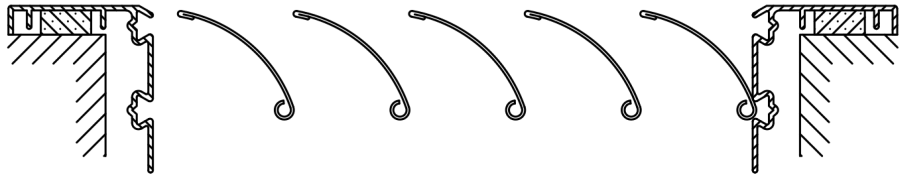

-F
Fixed Blades

