




- Inverted V-shaped blades on 2/3" spacing.
- Roll-formed blades designed to minimize vision past core, while maintaining free for transfer.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Mullions used for sizes over 22" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

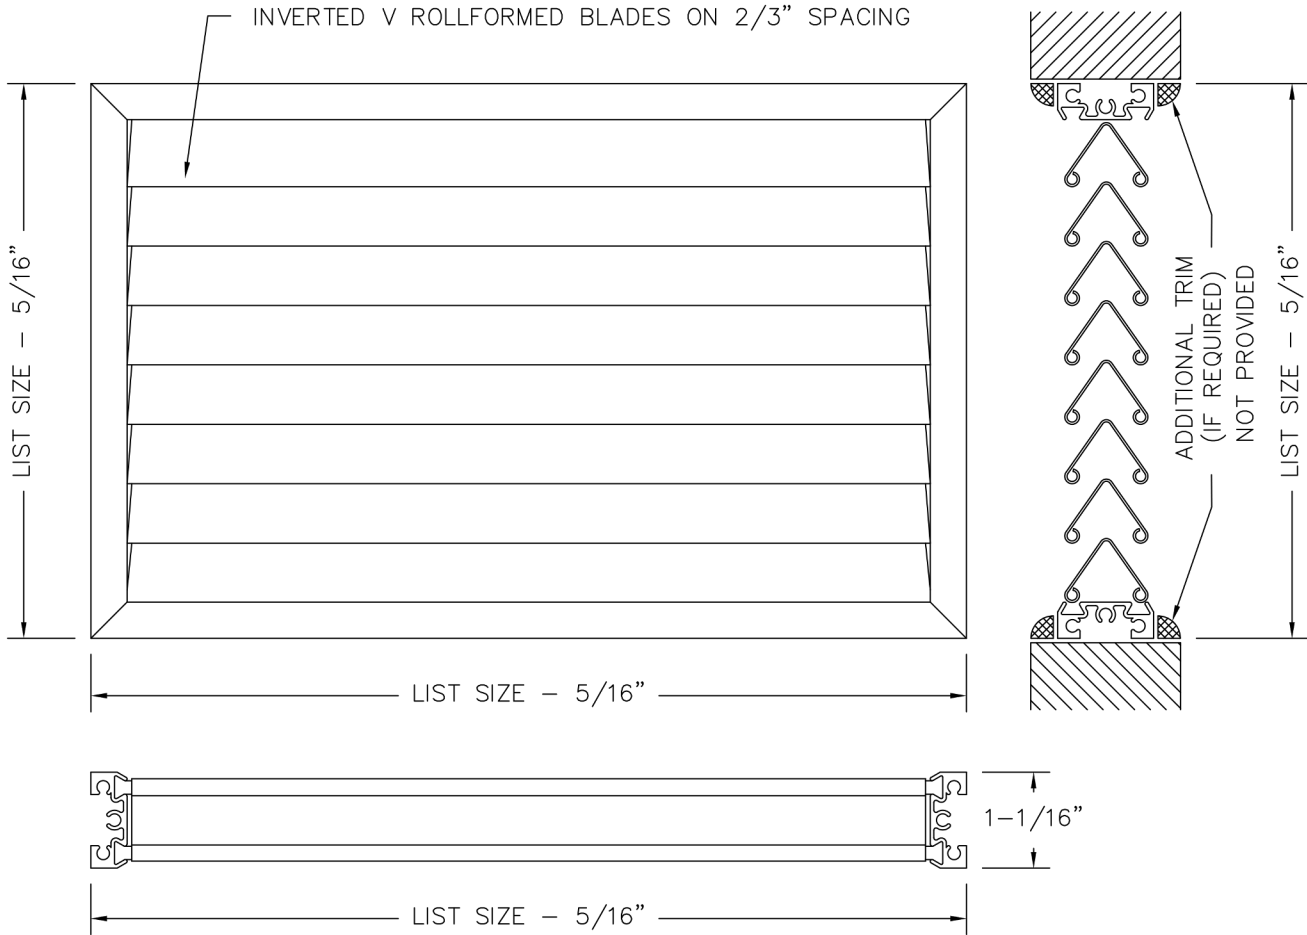

See submittal **DANV-A** for Transfer/Door Grille with Standard Flange Frame and Auxiliary Frame.  
See submittal **DANV-B** for Transfer/Door Grille with Standard Flange Frame Only.

**1. Specify the Length x Height Dimensions**

Inches      MM \_\_\_\_\_ x \_\_\_\_\_

**3. Select a Finish**

- W White
- S Silver
- M Mill

**4. Select a Lead Time**

- 3 Day Ship
- Next Friday
- Standard Delivery



**Project / Location:** \_\_\_\_\_

**Architect:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_

**Contractor:** \_\_\_\_\_

