




SINGLE BLOWER

**SINGLE BALANCED CENTRIFUGAL BLOWER  
WITH "FREE-AIR" CHAMBER**

BP1 - 630 CFM - VARIABLE SPEED MOTOR REQUIRES  
(1) 7" ROUND DUCT

Recommended for Standard Residential Cooking With A  
Four or Five Burner Cooking Surface. Also with (30") and Select (36")  
Professional Style Ranges.

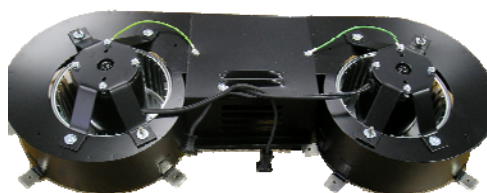

DUAL BLOWERS

**DUAL BALANCED CENTRIFUGAL BLOWERS  
WITH "FREE-AIR" CHAMBER**

(Two Single Blowers JOINED Together Into ONE Exit)

BP & PS - 730 CFM - VARIABLE SPEED MOTOR REQUIRES  
(1) 7" ROUND DUCT

Recommended for Use With Six Burner (36") Professional Style Ranges.




TWIN BLOWERS

**TWIN (TW) CENTRIFUGAL BLOWERS  
WITH "FREE-AIR" CHAMBERS**  
(Two Single Blowers with TWO Separate Exits)

PS1 & BP1 - 1355 CFM  
VARIABLE CONTROL MOTORS REQUIRES  
(2) 7" ROUND DUCTS

Recommended With Larger (48"+) Professional Style Ranges.

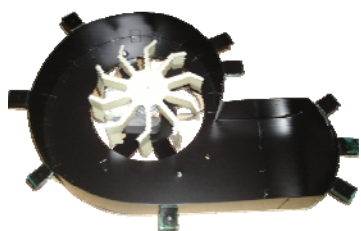

TURBO BLOWER

**TURBO BLOWER**

425 CFM @ 4.9 SONES  
VARIABLE SPEED

REQUIRES (1) 7" ROUND DUCT  
AVAILABLE ON N1900 SLIM LINE MODELS

Recommended for Standard Residential Cooking With A  
Four or Five Burner Cooking Surface.



Economy



SD2



SD4

**AIR-RING MOTORS**

SD2 - 360 CFM - TWO SPEED MOTOR  
SD4 - 430 CFM - VARIABLE SPEED MOTOR  
REQUIRES (1) 7" ROUND DUCT

Recommended for Standard Residential Cooking With A  
Four or Five Burner Cooking Surface.