



G-DD SERIES

Centrifugal, Forward Curved, Direct Drive
DWDI Blowers

FEATURES

- 3 speed, 115V, PSC motor.
- Corrosion resistant G90 galvanized housing.
- Universal base for 4 position discharge.
- Heavy duty, resilient mount, motor mounting bracket.




Available with EC motors.
See G-DDE in Green Products section.

PERFORMANCE SPECIFICATIONS



MODEL - HP	MEDIUM SPEED CFM @ STATIC PRESSURE - IN W.G. (see curves for High & Low speed performance)								
	0.5	0.6	0.7	0.8	0.9	1.0	1.2	1.4	1.6
G9-7-DD-1/3	--	--	1148	1041	841	--	--	--	--
G9-7-DD-1/2	1363	1270	1170	1045	865	--	--	--	--
G9-DD-1/3	--	--	1213	1025	742	--	--	--	--
G9-DD-1/2	--	1444	1316	1172	979	--	--	--	--
G10-8-DD-1/2	--	--	--	--	1372	1238	--	--	--
G10-8DD-3/4	--	--	--	--	--	1535	800	--	--
G10-DD-1/2	--	--	--	1514	1335	1115	--	--	--
G10-DD-3/4	--	--	1665	1581	1486	1379	1000	--	--
G12-9-DD-3/4	--	--	--	--	--	--	1358	1174	870
G12-10-DD-3/4	--	--	--	--	--	--	1393	1102	--

DIMENSIONS

MODEL - HP	A	B	C	D	E	H	L	WEIGHT (lbs) without motor
G9-7-DD-1/3	16 15/16"	15 1/16"	15 9/16"	10 1/4"	9 3/16"	10 3/16"	11 3/4"	33
G9-7-DD-1/2								36
G9-DD-1/3	16 15/16"	15 1/16"	15 9/16"	10 1/4"	11 13/16"	12 13/16"	11 3/4"	37
G9-DD-1/2								39
G10-8-DD-1/2	19"	16 3/4"	17 3/8"	11 3/8"	10 1/2"	11 1/2"	13 3/8"	40
G10-8DD-3/4								41
G10-DD-1/2	19"	16 3/4"	17 3/8"	11 3/8"	13 1/8"	14 1/8"	13 3/8"	42
G10-DD-3/4								45
G12-9-DD-3/4	22 1/8"	19 1/2"	20 5/8"	13 7/16"	12 1/4"	13 1/4"	16 1/8"	46
G12-10-DD-3/4	22 1/8"	19 1/2"	20 5/8"	13 7/16"	13 1/8"	14 1/8"	16 1/8"	47



HEAVY DUTY MOTOR
MOUNTING BRACKET

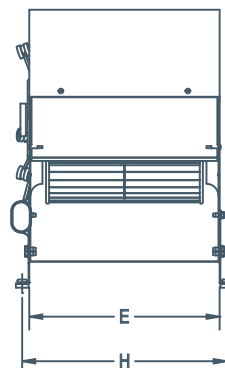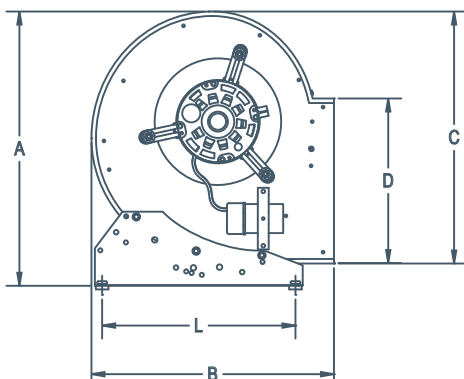

UNIVERSAL BASE FOR 4 POSITION
DISCHARGE