

HV SERIES

Belt drive wall fans designed for heavy duty, commercial and industrial exhaust applications



These fans are typically used for high volume, high static pressure applications.

The HV series is designed and constructed for efficient and economical operations while maximizing performance for heavy duty applications.


This fan is used for exhaust applications. Please consult factory for supply applications.

FEATURES

- Heavy gauge steel fan panel with deep spun and flared venturi for maximum efficiency.
- Heavy gauge welded steel motor and bearing supports.
- Galvanized heavy gauge steel fan blades that are statically and dynamically balanced.
- Heavy duty cast iron pillow block bearings.
- TEFC motors are standard.



Non-stock, made-to-order products are non-returnable and cannot be cancelled.

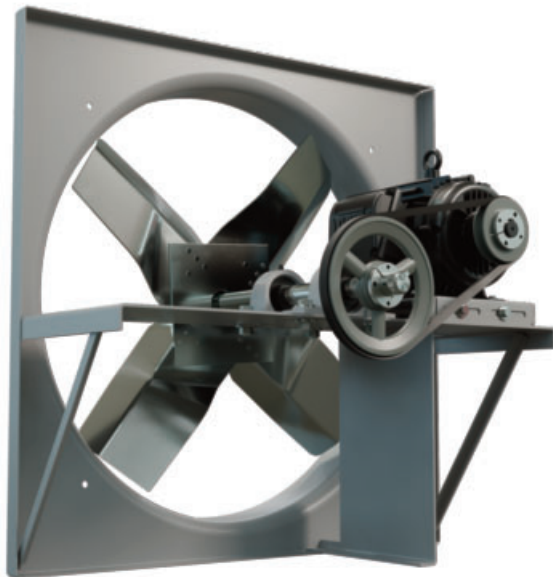

DIMENSIONS

MODEL	BLADE DIAMETER	A X A SQUARE	B	C (BELT DRIVE MOTOR FRAME)	
				56 - 184	213 - 286
HV24	24"	29.625"	4.0"	18"	--
HV30	30"	35.625"	4.5"	18"	--
HV36	36"	41.625"	5.0"	18"	28"
HV42	42"	47.625"	5.0"	18"	28"
HV48	48"	53.625"	5.0"	18"	28"
HV54	54"	59.657"	5.5"	18"	28"
HV60	60"	67.657"	6.0"	18"	28"

OPTIONS



For fan complete with cabinet/guard and shutter, substitute "T" with CBS




For fan complete with front sleeve and shutter, substitute "T" with SLS



For fan with rear sleeve and back guard, substitute "T" with SLB

For a complete listing of all available options, see the Options & Accessories page.

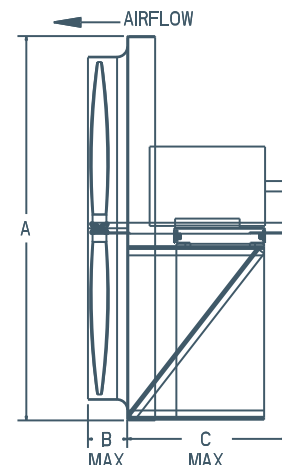

HV SERIES

SPECIFICATIONS

Single Phase

	MODEL #	SINGLE PHASE	WEIGHT (LBS.)	RPM	HP	dBA @ 5 ft	0"				1/8"				1/4"				1/2"				5/8"				3/4"			
							CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)
BLADE DIAMETER	24"	HV24T10100	139	1275	1.1	74	5900	0.75	0.88	0.76	5300	0.80	0.96	0.80	4700	0.90	0.95	0.89	3300	0.96	0.89	0.95	-	-	-	-	-	-	-	-
		HV24T10150	118	1475	1.5	78	6800	1.15	0.68	1.11	6300	1.26	0.74	1.21	5800	1.33	0.80	1.27	4700	1.43	0.83	1.36	-	-	-	-	-	-	-	-
		HV24T10200	162	1630	2.1	81	7500	1.55	0.56	1.46	7100	1.70	0.63	1.59	6600	1.75	0.69	1.63	5500	1.88	0.74	1.74	4950	1.98	0.73	1.83	-	-	-	-
		HV24T10300	175	1890	3.1	84	8700	2.42	0.42	2.20	8300	2.56	0.49	2.32	7900	2.66	0.55	2.41	7200	2.89	0.63	2.60	6800	2.92	0.67	2.63	6400	2.96	0.70	2.66
	30"	HV30T10100	155	975	1	73	8600	0.62	1.43	0.64	7700	0.73	1.44	0.74	6500	0.79	1.40	0.80	3800	0.99	0.97	0.97	-	-	-	-	-	-	-	-
		HV30T10150	136	1185	1.5	78	10500	1.13	1.00	1.10	9700	1.24	1.10	1.19	8900	1.37	1.13	1.30	6600	1.46	1.10	1.38	-	-	-	-	-	-	-	-
		HV30T10200	176	1285	2	82	11400	1.44	0.86	1.37	10700	1.60	0.95	1.50	9900	1.67	1.03	1.56	8100	1.80	1.09	1.68	6900	1.94	0.99	1.80	-	-	-	-
		HV30T10300	189	1505	3	85	13300	2.29	0.65	2.09	12700	2.46	0.74	2.24	12100	2.61	0.82	2.37	11000	2.80	0.95	2.53	9900	2.90	0.95	2.61	9200	2.99	0.96	2.69
	36"	HV30T10500	201	1845	5	90	16200	4.13	0.44	3.65	15700	4.28	0.53	3.77	15100	4.49	0.60	3.95	14200	4.77	0.73	4.18	13800	4.92	0.78	4.31	13300	4.95	0.83	4.33
		HV36T10150	167	729	1.5	73	12600	1.01	1.30	0.99	11200	1.13	1.36	1.10	9000	1.18	1.30	1.14	4200	1.46	0.74	1.38	-	-	-	-	-	-	-	-
		HV36T10200	211	828	2	77	14400	1.51	1.02	1.43	13200	1.64	1.12	1.54	11600	1.73	1.16	1.62	6100	1.94	0.79	1.80	-	-	-	-	-	-	-	-
		HV36T10300	221	985	3	82	17100	2.53	0.74	2.30	16100	2.68	0.85	2.43	14900	2.80	0.93	2.53	12000	2.96	0.98	2.66	8200	2.99	0.77	2.69	-	-	-	-
	42"	HV36T10500	233	1170	5	88	20300	4.24	0.53	3.74	19500	4.41	0.63	3.88	18700	4.65	0.71	4.08	16900	4.87	0.84	4.27	15400	4.96	0.86	4.34	13500	4.98	0.84	4.36
		HV36T10750	322	1344	7.5	90	23300	6.41	0.41	5.55	22700	6.60	0.50	5.71	22000	6.84	0.57	5.91	20300	7.28	0.68	6.27	19400	7.37	0.73	6.35	18100	7.47	0.75	6.43
		HV42T10150	210	575	1.5	72	15900	0.86	1.85	0.86	13600	1.00	1.80	0.98	9300	1.07	1.47	1.04	4400	1.37	0.82	1.30	-	-	-	-	-	-	-	-
		HV42T10200	250	675	2	77	18700	1.40	1.38	1.33	16800	1.57	1.45	1.48	14400	1.72	1.42	1.61	7500	1.94	0.95	1.80	-	-	-	-	-	-	-	-
	48"	HV42T10300	262	786	3	82	21700	2.19	1.05	2.01	20200	2.38	1.17	2.17	18400	2.57	1.22	2.33	11400	2.76	1.00	2.49	9000	2.98	0.85	2.68	-	-	-	-
		HV42T10500	276	958	5	87	26500	3.98	0.72	3.52	25300	4.23	0.84	3.73	23900	4.43	0.93	3.90	20500	4.89	1.00	4.28	17900	4.94	0.99	4.32	-	-	-	-
		HV42T10750	382	1103	7.5	91	30500	6.07	0.55	5.27	29500	6.32	0.66	5.48	28200	6.59	0.75	5.70	25700	7.16	0.86	6.17	24400	7.33	0.91	6.31	22700	7.47	0.93	6.43
		HV48T10200	275	540	2	80	22600	1.52	1.53	1.43	19900	1.70	1.58	1.59	15900	1.82	1.47	1.69	-	-	-	-	-	-	-	-	-	-	-	-
	54"	HV48T10300	294	651	3	85	25800	2.26	1.20	2.07	23500	2.47	1.30	2.25	20900	2.67	1.33	2.42	10700	2.98	0.88	2.68	-	-	-	-	-	-	-	-
		HV48T10500	309	790	5	89	31300	4.04	0.83	3.57	29400	4.27	0.96	3.76	27400	4.51	1.04	3.97	21800	4.85	1.07	4.25	15200	4.99	0.84	4.37	-	-	-	-
		HV48T10750	413	915	7.5	92	36300	6.30	0.62	5.46	34700	6.55	0.75	5.67	33000	6.83	0.84	5.90	29300	7.38	0.95	6.36	26700	7.48	0.97	6.44	-	-	-	-
		HV54T10200	354	417	2	70	23000	0.97	2.33	0.96	19400	1.17	2.17	1.13	11100	1.25	1.49	1.20	4200	1.68	0.65	1.57	-	-	-	-	-	-	-	-
60"	HV54T10300	372	520	3	78	28700	1.89	1.56	1.75	26200	2.10	1.68	1.93	22000	2.37	1.56	2.16	11400	2.52	1.09	2.29	9000	2.92	0.86	2.63	-	-	-	-	
	HV54T10500	392	640	5	83	35300	3.52	1.06	3.13	33400	3.78	1.22	3.35	30800	4.06	1.29	3.59	21700	4.41	1.17	3.88	16000	4.63	0.95	4.07	13700	4.81	0.88	4.22	
	HV54T10750	502	745	7.5	88	41000	5.51	0.80	4.80	39400	5.83	0.94	5.07	37600	6.11	1.06	5.30	32300	6.84	1.12	5.91	28300	7.02	1.09	6.06	22100	7.08	0.96	6.11	
	HV54T11000	500	825	10	91	45500	7.53	0.65	6.48	44000	7.85	0.79	6.75	42500	8.16	0.90	7.00	38200	8.93	1.02	7.64	35300	9.35	1.02	7.99	32300	9.51	1.03	8.12	
60"	HV60T10300	404	385	3	73	32700	1.49	2.19	1.41	28100	1.71	2.17	1.60	15500	1.85	1.42	1.72	7300	2.30	0.79	2.10	3500	2.50	0.44	2.27	1700	2.41	0.28	2.20	
	HV60T10500	412	500	5	81	42300	3.22	1.37	2.88	38800	3.54	1.49	3.15	35500	3.83	1.56	3.40	17500	4.00	1.05	3.54	14400	4.37	0.91	3.85	12500	4.72	0.82	4.14	
	HV60T10750	552	600	7.5	86	49900	5.29	1.00	4.62	46900	5.64	1.15	4.91	44100	6.00	1.25	5.21	36300	6.70	1.28	5.79	22900	6.66	0.94	5.76	18800	6.76	0.86	5.84	
	HV60T11000	557	660	10	89	55800	7.40	0.80	6.37	53200	7.82	0.94	6.72	50500	8.21	1.05	7.04	45100	9.01	1.18	7.71	40600	9.37	1.17	8.00	27600	9.47	0.89	8.09	

Three Phase

Three Phase						CFM @ STATIC PRESSURE																							
	MODEL # THREE PHASE	WEIGHT (LBS.)	RPM	HP	dBA @ 5 ft	0"				1/8"				1/4"				1/2"				5/8"				3/4"			
						CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)
BLADE DIAMETER	24"	HV24T30100*	139	1275	1	74	5900	0.75	0.91	0.74	5300	0.80	0.99	0.78	4700	0.90	0.97	0.87	3300	0.96	0.91	0.93	-	-	-	-	-	-	-
		HV24T30150*	118	1475	1.5	78	6800	1.15	0.69	1.10	6300	1.26	0.75	1.19	5800	1.33	0.81	1.26	4700	1.43	0.84	1.35	-	-	-	-	-	-	-
		HV24T30200*	162	1630	2	81	7500	1.55	0.56	1.46	7100	1.70	0.62	1.59	6600	1.75	0.69	1.64	5500	1.88	0.74	1.76	4950	1.98	0.72	1.85	-	-	-
		HV24T30300*	175	1890	3	84	8700	2.42	0.43	2.17	8300	2.56	0.50	2.29	7900	2.66	0.56	2.38	7200	2.89	0.64	2.58	6800	2.92	0.67	2.61	6400	2.96	0.70
	30"	HV30T30100*	155	975	1	73	8600	0.62	1.48	0.62	7700	0.73	1.49	0.72	6500	0.79	1.45	0.77	3800	0.99	0.99	0.95	-	-	-	-	-	-	-
		HV30T30150*	136	1185	1.5	78	10500	1.13	1.02	1.08	9700	1.24	1.11	1.18	8900	1.37	1.14	1.29	6600	1.46	1.11	1.37	-	-	-	-	-	-	-
		HV30T30200*	176	1285	2	82	11400	1.44	0.86	1.36	10700	1.60	0.95	1.50	9900	1.67	1.03	1.57	8100	1.80	1.08	1.68	6900	1.94	0.99	1.81	-	-	-
		HV30T30300*	189	1505	3	85	13300	2.29	0.66	2.06	12700	2.46	0.75	2.21	12100	2.61	0.83	2.34	11000	2.80	0.96	2.50	9900	2.90	0.95	2.59	9200	2.99	0.96
	HV30T30500*	201	1845	5	90	16200	4.13	0.44	3.65	15700	4.28	0.53	3.78	15100	4.49	0.60	3.97	14200	4.77	0.72	4.22	13800	4.92	0.77	4.36	13300	4.95	0.82	4.39
	36"	HV36T30150*	167	729	1.5	73	12600	1.01	1.32	0.97	11200	1.13	1.38	1.08	9000	1.18	1.32	1.12	4200	1.46	0.75	1.37	-	-	-	-	-	-	-
		HV36T30200*	211	828	2	77	14400	1.51	1.02	1.43	13200	1.64	1.12	1.54	11600	1.73	1.15	1.62	6100	1.94	0.78	1.81	-	-	-	-	-	-	-
		HV36T30300*	221	985	3	82	17100	2.53	0.75	2.27	16100	2.68	0.86	2.40	14900	2.80	0.94	2.50	12000	2.96	0.99	2.65	8200	2.99	0.78	2.67	-	-	-
HV36T30500*		233	1170	5	88	20300	4.24	0.53	3.74	19500	4.41	0.63	3.90	18700	4.65	0.70	4.11	16900	4.87	0.83	4.32	15400	4.96	0.85	4.40	13500	4.98	0.83	4.42
HV36T30750*	322	1344	7.5	90	23300	6.41	0.41	5.49	22700	6.60	0.50	5.66	22000	6.84	0.57	5.87	20300	7.28	0.68	6.26	19400	7.37	0.73	6.34	18100	7.47	0.75	6.43	
42"	HV42T30150*	210	575	1.5	72	15900	0.86	1.88	0.84	13600	1.00	1.83	0.96	9300	1.07	1.49	1.03	4400	1.37	0.83	1.29	-	-	-	-	-	-	-	
	HV42T30200*	250	675	2	77	18700	1.40	1.38	1.33	16800	1.57	1.45	1.48	14400	1.72	1.41	1.61	7500	1.94	0.94	1.81	-	-	-	-	-	-	-	
	HV42T30300*	262	786	3	82	21700	2.19	1.07	1.97	20200	2.38	1.19	2.14	18400	2.57	1.24	2.30	11400	2.76	1.01	2.47	9000	2.98	0.85	2.66	-	-	-	
	HV42T30500*	276	958	5	87	26500	3.98	0.72	3.51	25300	4.23	0.84	3.73	23900	4.43	0.93	3.91	20500	4.89	0.99	4.33	17900	4.94	0.98	4.38	-	-	-	
HV42T30750*	382	1103	7.5	91	30500	6.07	0.56	5.20	29500	6.32	0.67	5.41	28200	6.59	0.75	5.65	25700	7.16	0.87	6.15	24400	7.33	0.91	6.30	22700	7.47	0.93	6.43	
48"	HV48T30200*	275	540	2	80	22600	1.52	1.53	1.43	19900	1.70	1.57	1.59	15900	1.82	1.46	1.70	-	-	-	-	-	-	-	-	-	-	-	
	HV48T30300*	294	651	3	85	25800	2.26	1.22	2.03	23500	2.47	1.32	2.21	20900	2.67	1.34	2.39	10700	2.98	0.88	2.66	-	-	-	-	-	-	-	
	HV48T30500*	309	790	5	89	31300	4.04	0.83	3.57	29400	4.27	0.96	3.77	27400	4.51	1.04	3.99	21800	4.85	1.06	4.30	15200	4.99	0.83	4.43	-	-	-	
	HV48T30750*	413	915	7.5	92	36300	6.30	0.63	5.39	34700	6.55	0.75	5.61	33000	6.83	0.84	5.86	29300	7.38	0.95	6.35	26700	7.48	0.97	6.44	-	-	-	
54"	HV54T30200*	354	417	2	70	23000	0.97	2.32	0.96	19400	1.17	2.17	1.13	11100	1.25	1.50	1.20	4200	1.68	0.65	1.58	-	-	-	-	-	-	-	
	HV54T30300*	372	520	3	78	28700	1.89	1.59	1.72	26200	2.10	1.71	1.90	22000	2.37	1.58	2.13	11400	2.52	1.10	2.26	9000	2.92	0.87	2.61	-	-	-	
	HV54T30500*	392	640	5	83	35300	3.52	1.07	3.11	33400	3.78	1.22	3.34	30800	4.06	1.29	3.58	21700	4.41	1.16	3.90	16000	4.63	0.94	4.10	13700	4.81	0.87	4.26
	HV54T30750*	502	745	7.5	88	41000	5.51	0.81	4.72	39400	5.83	0.96	4.99	37600	6.11	1.07	5.23	32300	6.84	1.13	5.87	28300	7.02	1.10	6.03	27000	7.08	0.96	6.08
HV54T31000*	500	825	10	91	45500	7.53	0.65	6.44	44000	7.85	0.79	6.71	42500	8.16	0.90	6.97	38200	8.93	1.02	7.64	35300	9.35	1.02	8.00	32300	9.51	1.03	8.14	
60"	HV60T30300*	404	385	3	73	32700	1.49	2.22	1.39	28100	1.71	2.21	1.57	15500	1.85	1.44	1.69	7300	2.30	0.80	2.07	3500	2.50	0.44	2.24	1700	2.41	0.28	2.16
	HV60T30500*	412	500	5	81	42300	3.22	1.38	2.85	38800	3.54	1.50	3.13	35500	3.83	1.57	3.38	17500	4.00	1.05	3.53	14400	4.37	0.90	3.86	12500	4.72	0.82	4.18
	HV60T30750*	552	600	7.5	86	49900	5.29	1.02	4.53	46900	5.64	1.17	4.83	44100	6.00	1.27	5.13	36300	6.70	1.29	5.74	22900	6.66	0.95	5.71	18800	6.76	0.86	5.80
	HV60T31000*	557	660	10	89	55800	7.40	0.81	6.33	53200	7.82	0.95	6.68	50500	8.21	1.06	7.02	45100	9.01	1.18	7.71	40600	9.37	1.17	8.02	27600	9.47	0.89	8.11
HV60T31500*	641	735	15	93	62200	10.24	0.66	8.66	59800	10.70	0.79	9.04	57400	11.16	0.89	9.43	53100	12.00	1.05	10.14	50800	12.36	1.11	10.44	45800	12.93	1.08	10.93	



WALL EXHAUST FANS & VENTURI DIMENSIONS

for Standard Options

VENTURI





BLADE DIAMETER	A X A SQUARE	B	C					
			BELT DRIVE MOTOR FRAME			DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286	
12"	16.125"	2.0"	--	--	13"	--	--	--
14"	18.125"	2.5"	--	--	13"	--	--	--
16"	20.125"	3.0"	--	--	13"	--	--	--
18"	22.125"	3.0"	--	--	13"	--	--	--
20"	24.125"	3.5"	--	--	13"	--	--	--
24"	29.625"	4.0"	18"	--	13"	14"	--	--
30"	35.625"	4.5"	18"	--	13"	14"	25"	--
36"	41.625"	5.0"	18"	28"	13"	14"	25"	--
42"	47.625"	5.0"	18"	28"	13"	14"	25"	--
48"	53.625"	5.0"	18"	28"	--	14"	25"	--
54"	59.657"	5.5"	18"	28"	--	--	--	--
60"	67.657"	6.0"	18"	28"	--	--	--	--

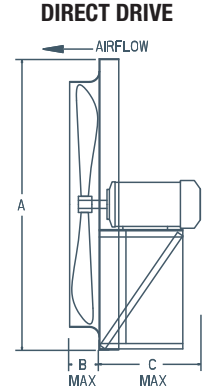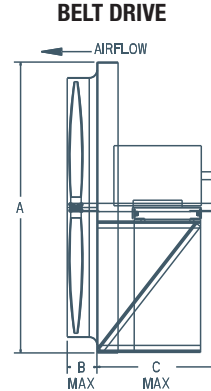

CABINET, BACK GUARD & SHUTTER (CBS)





BLADE DIAMETER	A X A SQUARE	B	B					
			BELT DRIVE MOTOR FRAME			DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286	
12"	16.375"	--	--	--	26"	--	--	--
14"	18.375"	--	--	--	26"	--	--	--
16"	20.375"	--	--	--	26"	--	--	--
18"	22.375"	--	--	--	26"	--	--	--
20"	24.375"	--	--	--	26"	--	--	--
24"	29.875"	33"	--	--	33"	33"	--	--
30"	35.875"	33"	--	--	33"	33"	43"	--
36"	41.875"	33"	43"	--	33"	33"	43"	--
42"	47.875"	33"	43"	--	33"	33"	43"	--
48"	53.875"	33"	43"	--	--	33"	43"	--
54"	59.9375"	33"	43"	--	--	--	--	--
60"	67.9375"	33"	43"	--	--	--	--	--




FRONT SLEEVE & SHUTTER (SLS)





BLADE DIAMETER	A X A SQUARE	B	C					
			BELT DRIVE MOTOR FRAME			DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286	
12"	16.375"	15.0"	--	--	12"	--	--	--
14"	18.375"	15.0"	--	--	12"	--	--	--
16"	20.375"	15.0"	--	--	12"	--	--	--
18"	22.375"	15.0"	--	--	12"	--	--	--
20"	24.375"	15.0"	--	--	12"	--	--	--
24"	29.875"	19.0"	15"	--	10"	11"	--	--
30"	35.875"	19.0"	15"	--	10"	11"	22"	--
36"	41.875"	19.0"	15"	25"	10"	11"	22"	--
42"	47.875"	19.0"	15"	25"	10"	11"	22"	--
48"	53.875"	19.0"	15"	25"	--	11"	22"	--
54"	59.9375"	19.0"	15"	25"	--	--	--	--
60"	67.9375"	19.0"	15"	25"	--	--	--	--

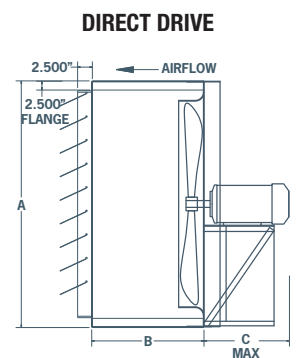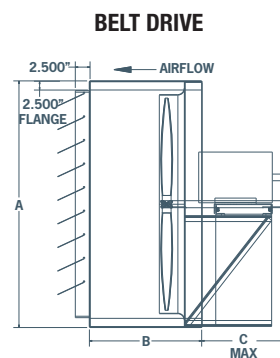

REAR SLEEVE & BACK GUARD (SLB)



BLADE DIAMETER	A X A SQUARE	B	C					
			BELT DRIVE MOTOR FRAME			DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286	
12"	16.375"	2.0"	--	--	15"	--	--	--
14"	18.375"	2.5"	--	--	15"	--	--	--
16"	20.375"	3.0"	--	--	15"	--	--	--
18"	22.375"	3.0"	--	--	15"	--	--	--
20"	24.375"	3.5"	--	--	15"	--	--	--
24"	29.875"	4.0"	19"	--	19"	19"	--	--
30"	35.875"	4.5"	19"	--	19"	19"	29"	--
36"	41.875"	5.0"	19"	29"	19"	19"	29"	--
42"	47.875"	5.0"	19"	29"	19"	19"	29"	--
48"	53.875"	5.0"	19"	29"	--	19"	29"	--
54"	59.9375"	5.5"	19"	29"	--	--	--	--
60"	67.9375"	6.0"	19"	29"	--	--	--	--




OPTIONS & ACCESSORIES

CABINET, BACK GUARD & SHUTTER (CBS)



REAR SLEEVE & BACK GUARD (SLB)

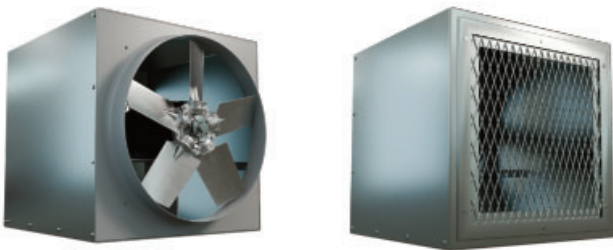

FRONT SLEEVE & SHUTTER (SLS)



STEEL CONTROL & MOTORIZED CONTROL DAMPERS



Motorized steel control dampers can be mounted in fan cabinet or sleeve in either exhaust or intake applications. Consult factory.

GUARDS

FRONT GUARD

Front guards available, consult factory.

Wire mesh not available on all sizes.



MOTOR OPTIONS

TWO SPEED MOTOR

Two speed motors are available for some of Canarm/LFI's exhaust fans. 1800/1200 or 1800/900 RPM variable torque, single and three phase. Consult factory for available voltages and configurations.

EXPLOSION PROOF MOTORS

Some of Canarm/LFI exhaust fans can be equipped with Explosion Proof Motors for hazardous locations. Class I, Groups C & D - Class II, Groups F & G. Consult factory for models.

Class I, Group C Atmospheres containing ethyl ether, ethylene, gases or vapors of equivalent hazard.

Class I, Group D Atmospheres such as acetone, ammonia, benzene, butane, cyclopropane, ethanol, gasoline, hexane, methane, natural gas, naphtha, propane, or gasses or vapors of equivalent hazard.

Class II Group F Atmospheres containing carbonaceous dust, including carbon black, charcoal, coal, or coke dusts that have more than 8% total entrapped volatiles, or dusts that have been sensitized by other materials so that they present an explosion hazard.

Class II Group G Atmospheres containing combustible dusts not included in group E or F, including flour, grain, wood, plastic and chemicals.


SPECIAL COATING

For most applications, Canarm's standard enamel paint will provide the necessary surface protection for painted parts. For special requirements, coatings such as hot dipped galvanizing and epoxy, please consult factory.

DISCONNECT SWITCHES


Wire disconnect switches are available. See Controls & Thermostats section for details.

HOODS




GH GALVANIZED HOODS

- Economical shipping.
- Easy to assemble, galvanized hood.
- No screens.




GH KNOCK DOWN HOODS

- Easy to assemble, galvanized hood.
- Includes bird screen.




WHA HOODS

- For AX fans.
- Shipped fully assembled.
- 18 gauge galvanized weather hoods complete with bird screen.
- Optional insect screen available. Consult factory.



WHP HOODS

- For Panel fans.
- 18 gauge galvanized weather hoods complete with bird screen.
- Optional insect screen available. Consult factory.



INTAKE & EXHAUST HOODS

- Shipped fully assembled.
- 18 gauge galvanized weather hoods complete with bird screen.



PLASTIC HOODS

- Rugged, grey plastic hood.
- No screens.

HOOD MODEL	DIMENSIONS		APPROX. WEIGHT (LBS)	FANS THAT WILL FIT
	INSIDE DIMENSIONS	OUTSIDE DIMENSIONS		
GH GALVANIZED HOODS				
GH-XF12-M	14.75"W X 14.0"H	18"W X 15.75"H	4	XF12 / XB12 / SD8 / SD10 / AX8 / AX10 / AX12
GH-XF16-M	18.75"W 17.75"H	22"W X 19.75"H	7	XF16 / XB12 / HV12 / HVA12 / ADD12 / DDP12 / DDS12 / SD12-14 / AX14-16
GH-XF20-M	22.75"W X 22"H	26"W X 23.75"H	9	XF20 / XB14 / XB16 / HV14-16 / HVA14-16 / ADD14-16 / DDP14-16 / DDS14-16 / SD16-18 / AX18-20
GH-XF24-M	26.75"W 26"H	29"W X 27.25"H	12	XFS24
GH KNOCKDOWN HOODS				
GH-KD24	31.65"W X 31.66"H	34.65"W X 34.69"H	31	XB24 / HV24 / HVA24 / ADD24 / DDP24 / DDS24 / SD24 / AX24
GH-KD36	43.62"W X 43.93"H	46.62"W X 46.82"H	75	XB30-36 / HV30-36 / HVA30-36 / ADD30-36 / DDS30-36 / SD30-36 / AX30-36 / AX42
GH-KD48	55.62"W X 55.25"H	58.62"W X 58.82"H	TBA	XB42-48 / HV42-48 / HVA42-48 / ADD42-48 / DDS42-48 / SD42 / AX42
GH-KD60	69.76"W X 69.92"H	72.76"W X 72.95"H	TBA	XB54-60 / HV54-60 / HVA54-60 / ADD54-60
WHA HOODS				
WHA8-10	12.11"W X 12.11"H	-	13	AX08-10, SD8
WHA12	14.05"W X 14.05"H	-	16	AX12, SD10
WHA14	16.11"W X 16.11"H	-	22	AX14, SD12
WHA16	18.11"W X 18.11"H	-	26	AX16, SD14
WHA18	20.11"W X 20.11"H	-	29	AX18, SD16
WHA20	22.05"W X 22.05"H	-	31	AX20, SD18
WHA24	26.05"W X 26.05"H	-	47	AX24
WHA30	33.05"W X 33.05"H	-	59	AX30
WHA36	39.11"W X 39.11"H	-	76	AX36
WHP HOODS				
WH8-10P	14.45"W x 14.45"H	-	20	P08 / P10
WH12P	17.40"W X 17.40"H	-	16	P12
WH14P	19.20"W X 19.20"H	-	24	P14
WH16P	21.20"W X 21.20"H	-	26	P16
WH18P	23.20"W X 23.20"H	-	29	P18
WH20P	25.20"W X 25.20"H	-	44	P20
WH24P	29.15"W X 29.15"H	-	44	P24
WH30P	35.65"W X 35.65"H	-	60	P30
WH36P	41.65"W X 41.65"H	-	77	P36
EXHAUST / INTAKE / WEATHER HOODS				
EH12	16.55"W X 16.55"H	-	9	XF12 / SD8-12 / AX8-14 / XB12 / HV12 / HVA12 / ADD12 / DDP12 / DDS12
EH14	18.60"W X 18.60"H	-	15	XB14 / HV14 / HVA14 / ADD14 / DDP14 / DDS14 / SD14 / XF16 / AX16
EH16	20.60"W X 20.60"H	-	20	AX18 / SD16 / XB16 / HV16 / HVA16 / ADD16 / DDP16 / DDS16
EH18	22.55"W X 22.55"H	-	31	SD18 / XB18 / HV18 / HVA18 / ADD18 / DDP18 / DDS18 / XF20 / AX20
EH20	24.55"W X 24.55"H	-	44	SD20 / XB20 / XF24 / HV20 / HVA20 / ADD20 / DDP20 / DDS20
EH24	30.05"W X 30.05"H	-	60	SD24 / AX24 / XB24 / ADD24 / HV24 / HVA24 / DDP24 / DDS24
EH30	36.35"W X 36.35"H	-	72	SD30 / AX30 / XB30 / HV30 / HVA30 / ADD30 / DDS30 / JFHVA24
EH36	42.30"W X 42.30"H	-	104	SD36 / AX36 / XB36 / HV36 / HVA36 / ADD36 / DDS36 / JFHVA30
EH42	48.63"W X 48.63"H	-	163	XB42 / HV42 / HVA42 / ADD42 / DDS42 / JFHVA36 / SD42 / AX42
EH48	54.64"W X 54.64"H	-	TBA	XB48 / HV48 / HVA48 / ADD48 / DDS48 / JFHVA42
EH54	61.20"W X 61.20"H	-	TBA	XB54 / HV54 / HVA54 / ADD54 / JFHVA48
EH60	69.39"W X 69.39"H	-	TBA	XB60 / HV60 / HVA60 / ADD60
PLASTIC HOODS				
HFP-18G	21.50"W X 21.75"H	-	9	S8 / S10 / S12 / S14 / S16 / S18V / AX08 / AX10 / AX12 / AX14 / AX16 / AX18
HFP-24G	27.50"W X 27.75"H	-	13	S20 / S24 AX20 / AX24

FILTER SECTION FOR WALL FANS

Fits XB, SXB, HV, HVA, ADD, DDP and DDS Series



FRONT



BACK

TYPICAL INSTALLATION

Supply & exhaust

FEATURES

- Filter sections are available in eight sizes from 24" to 60" wall mount propeller fans.
- Filters are accessible through bolted side panel for maintenance or replacement.
- Permanent expanded aluminum filters have large surface area for efficient filtration.
- Washable filters for easy cleaning (remove filter from cabinet for washing).
- Flanged or sleeve inlets side suitable for different designs.
- Filter sections could be used for intake or exhaust filtration.
- Shipped assembled or knock down for easy field assembly.



Needs rear sleeve to connect filter section & wall fan together.

DIMENSIONS

FAN SIZE	FLANGE MOUNT	SLEEVE MOUNT	A	B	B2	# OF FILTERS
				FLANGE MOUNT	SLEEVE MOUNT	
24"	FB24	FBS24	30 1/2"	22 3/8"	28 3/8"	4
30"	FB30	FBS30	36 1/2"	25 1/4"	31 1/4"	4
36"	FB36	FBS36	42 1/2"	21 5/8"	27 5/8"	4
42"	FB42	FBS42	48 1/8"	28 1/4"	34 1/4"	9
48"	FB48	FBS48	54 1/4"	26 3/8"	32 3/8"	9
54"	FB54	FBS54	60 1/2"	24 1/16"	30 1/16"	9
60"	FB60	FBS60	68 1/2"	27 1/4"	33 1/4"	12

