

RESIDENTIAL EQUIPMENT BC04 CONTROL

FEATURES




- Two speed Fan setting with indicator Light (Low/High)
- 20/40 mode with indicator light
- ON/OFF push button with indicator light
- Standby setting (fan speed 0)
- Compatible with wireless timer
- Connect to 3-wire 20-gauge(min) low voltage, 100 ft length (max)
- May either be installed onto a flush mounted electrical switch box or surface mounted onto a wall

Icon	Function	Description
	Turning On the Control	Press to turn the control ON or OFF. ON/OFF light will illuminate when active.
	Setting the Ventilation Speed	Select LOW or HIGH fan speed. Indicator light will illuminate accordingly.
20/40	Setting the 20/40 Mode	After a fan speed has been selected, press the 20/40 button. The 20/40 mode indicator light will illuminate. The 20/40 mode is a repeating cycle. The fan will run at LOW or HIGH speed for 20 minutes, then turn Off for 40 minutes. Some units are equipped to recirculate the air in your home during the 40-minute cycle with no ventilation. The control will automatically detect this feature and recirculate the air during the 40-minute cycle at the selected fan speed.
HI LO	Fan Speed Indicator	Displays current fan speed: LOW, HIGH, or OFF.

OPERATING INSTRUCTIONS

- **Turning on the Control:** Press the ON/OFF button. The ON/OFF indicator light will illuminate.
- **Setting the Ventilation Speed:** Press the Fan button to select **LOW or HIGH fan speed**. If both indicators are OFF, the fan is OFF but may activate via a remote timer (if installed).
- **Setting the 20/40 Mode:** After selecting a fan speed, press the 20/40 button. Fan will run at selected speed for 20 minutes, then OFF for 40 minutes. On equipped units to recirculate the air in the home, fan recirculates during the 40-minute cycle.

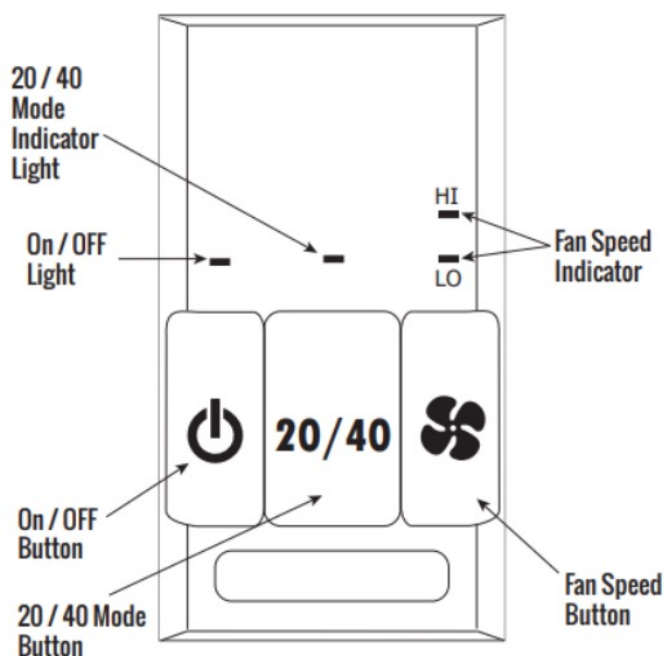

RESIDENTIAL EQUIPMENT BC04 CONTROL

DIMENSIONS

Attention:

- Only one main control can be installed into a ventilation system.
- Recirculation is not available on all models.
- Timers will not function when the mode is set to OFF, unless specifically installed for this function.

