





EASY PRO[®] SERIES

5TH GEN DO-IT-YOURSELF MINI-SPLIT



*The original, registered owner must be enrolled in the MRCOOL[®] Care Program every year in order to qualify for the 2 year full unit replacement for compressor failure and lifetime compressor replacement.

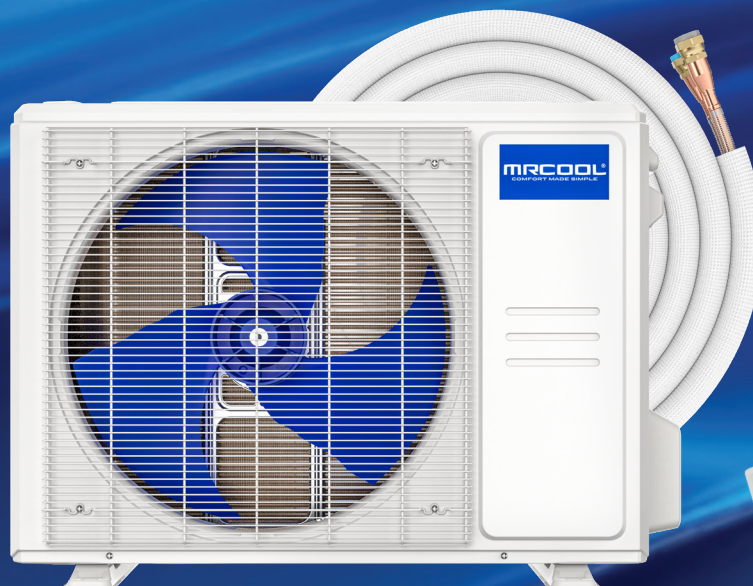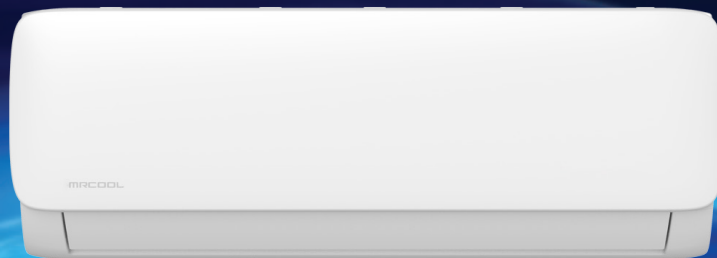

Includes 16 ft installation kit.*



SMART HVAC CONTROLLER[®]

AFFORDABLE & EFFICIENT COMFORT.



SCAN HERE
for the most up-to-date
version of this brochure.

Version Date: 05-12-2025

www.mrcool.com



Timer



Leakage Detection



Follow Me®



Gold Fin® Condenser



Smartphone App

LOW 5°F

Low Temp Cooling*



Quiet Running



DC Inverter

SPECIFICATIONS

*For models with low temp cooling systems.

MODEL NO.	Indoor Unit Outdoor Unit	EZPRO-09-HP-WMAH-115D-0 EZPRO-09-HP-C-11516D-0	EZPRO-12-HP-WMAH-115D-0 EZPRO-12-HP-C-11516D-0	EZPRO-18-HP-WMAH-230D-0 EZPRO-18-HP-C-23016D-0	EZPRO-24-HP-WMAH-230D-0 EZPRO-24-HP-C-23016D-0
-----------	-----------------------------	---	---	---	---

CAPACITY & PERFORMANCE

Cooling Capacity	Btu/h	9000	12000	17000	24000
SEER2	Btu/w	20.2	19.5	20.0	18.9
Heating Capacity	Btu/h	10000	12000	18000	25000
HSPF2-4	Btu/w	9.2	9.3	8.5	8.7
HSPF2-5	Btu/w	7.1	7	6.6	6.9
Max Coverage Area*	Sq Ft	Up to 400	Up to 550	Up to 800	Up to 1050
Indoor noise level (Turbo/Hi/Mi/Lo/Si)	dB(A)	43.0/35.0/31.0/22.0/18.0	44.5/40.0/35.0/25.5/17.5	46.5/43.0/36.5/30.0/18.5	51.5/45.5/40.5/26.5/21.5
Outdoor noise level (Hi/Mi/Lo)	dB(A)	54	54	55	61

*Max Coverage Area is determined using ideal installation conditions.

ELECTRICAL PARTS

Power Supply	Ph-V-Hz	115V,1Ph,60Hz	115V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz
Outdoor Minimum Circuit Ampacity	A	17.0	19.5	15.0	19.0
Outdoor Maximum Fuse (Breaker)*	A	20.0	20.0	20.0	20.0

DIMENSIONS & WEIGHT

Net Dimension (WxDxH)	Indoor	inch mm	28.70 x 7.87 x 11.50 729 x 200 x 292	31.57 x 7.87 x 11.61 802 x 200 x 295	38.23 x 8.98 x 12.64 971 x 228 x 321	42.60 x 9.21 x 13.27 1082 x 234 x 337
	Outdoor	inch mm	28.35 x 10.63 x 19.49 720 x 270 x 495	28.35 x 10.63 x 19.49 720 x 270 x 495	30.12 x 11.93 x 21.85 765 x 303 x 555	35.04 x 13.46 x 26.50 890 x 342 x 673
Packing Dimension (WxDxH)	Indoor	inch mm	32.68 x 16.14 x 13.58 830 x 410 x 345	36.02 x 17.95 x 14.17 915 x 456 x 360	41.14 x 12.01 x 15.94 1085 x 305 x 405	45.47 x 16.34 x 12.40 1155 x 415 x 315
	Outdoor	inch mm	32.87 x 10.63 x 21.26 835 x 270 x 540	32.87 x 10.63 x 21.26 835 x 270 x 540	34.92 x 13.27 x 24.02 887 x 337 x 610	39.17 x 15.67 x 29.13 995 x 398 x 740
Net/Gross Weight	Indoor	lbs kg	23.81/33.95 10.8/15.4	24.91/35.71 11.3/16.2	30.64/44.97 13.9/20.4	35.49/49.60 16.1/22.5
	Outdoor	lbs kg	54.67/66.58 24.8/30.2	54.89/67.24 24.9/30.5	62.61/82.23 28.4/37.3	95.90/117.73 43.5/53.4

REFRIGERANT & PIPING

Refrigerant Type (R-454B)	oz	17.28	21.52	34.92	50.44
Piping Size Liquid Side/Gas Side	inch mm	1/4" / 3/8" 6.35 / 9.52	1/4" / 3/8" 6.35 / 9.52	1/4" / 1/2" 6.35 / 12.7	3/8" / 5/8" 9.52 / 15.9

REBATE SUMMARY

NEEP	✓	✓	✓	✓
GHG			✓	✓
CEE Tier1 - North	✓	✓	✓	✓

*Pat: <https://www.mrcool.com/mrcool-patents/>

All specifications are preliminary and are subject to change during mass production.