

This versatile 24V Lead/Lag Controller offers balanced operating time between 2 redundant devices. Status LEDs indicate the controller is powered and which piece of equipment is currently being energized. The iO-LL can be used on HVAC equipment, industrial equipment, heating equipment, cooling equipment, fans, pumps and motors.

## Features and Benefits:

- Microprocessor controlled
- Compact design
- Isolated inputs and outputs
- Status LEDs
- Reduces equipment maintenance and wear
- Can be used with the Twinning Kit

## Warranty:

- 5 Years




## Specifications:

<b>Mounting</b>	Aluminum back plate with mounting holes
<b>Dimensions</b>	8.00" Height x 6.00" Width x 1.50" Depth
<b>Input Voltage</b>	24VAC

# BOARD DIAGRAM

## iO-LL LEAD/LAG CONTROL

Signal 1 IN  
Signal 2 IN  
Unit 1  $\overline{C}$   
Unit 1  $\overline{C}$   
Unit 2  $\overline{C}$   
Unit 2  $\overline{C}$   
24V R  
24V C

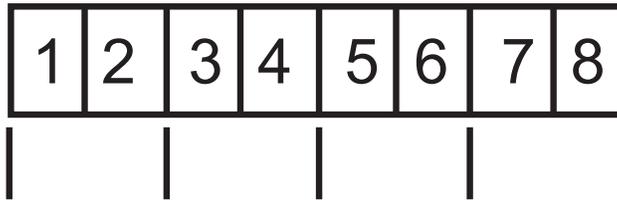

5351 East Thompson Road Suite 142  
Indianapolis, IN 46237  
P: 888.359.0362  
F: 317.489.5204

info@iohvaccontrols.com  
www.iohvaccontrols.com