



Mini Orange Silent+

Mini-Split Condensate Pump Kit 115v 83911 (ASP-MO-115-SP)

(Sec. I) Product Specifications:

Pump Length - 4.25"
Pump Width - 1.5"
Pump Height - 2"
Capacity - 3.2 GPH @ 0" Head / 1.6 GPH @ 33" Head Max BTUs - 54,600
Max Head in Feet - 33
Max Temperature - 104F
Max Suction Lift - 5"
Sound Level - 26dB(A) Dry
Contact Rating - 3A NC
Voltage - 115
Amperes - .29
Watts - 15
Remote Reservoir - Y
Plenum Rated - N

Pump Selector & Wiring Diagrams Available at

http://www.rectorseal.com/aspenpump.html

Cable Length - 6"

(Sec. II) Ordering Information:

Product Code - 83911 Model - ASPMO115SP Carton Qty - 1 Carton Weight - 2


(Sec. III) Carton Contents:

Pump Assembly Inline Reservoir Submersible Reservoir 5'x1/4" i.d. Vinyl Discharge Tube Modular 6' Power Cable 6"x1/4" i.d. Vinyl Breather Tube Drain Hose Adaptor Inline Fuse Cable Ties (6) Self-Adhesive Velcro Strips (2) 8"x5/8" i.d. Inlet Tube Installation Manual Anti-Siphon (1) 90° Elbow

(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

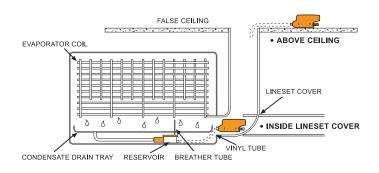

(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)

ASPEN® is a registered trademark of Aspen Oldco Limited Company UK

Mini Orange Silent+ Mini-Split Condensate Pump Kit 115v

83911 (ASP-MO-115-SP)


Aspen Pump BTU Calculator



H-AP-S-15

| Mini Orange 115v 60Hz | | |
|-----------------------|-----|-------|
| Head | GPH | BTU |
| 0 | 3.2 | 54600 |
| 5 | 2.9 | 49500 |
| 10 | 2.6 | 44350 |
| 15 | 2.4 | 42000 |
| 20 | 2.2 | 37500 |
| 25 | 1.9 | 33250 |
| 30 | 1.7 | 29250 |
| 33 | 1.6 | 27500 |

© 2015 RectorSeal®

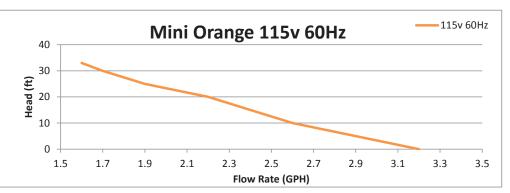

Contact: RectorSeal® 2601 Spenwick Drive, Houston, TX P 713-263-8001 800-231-3345 F 713-263-7577 800-441-0051 W www.rectorseal.com